
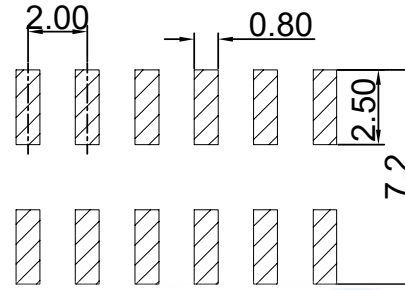


DRAWING FOR CUSTOMER

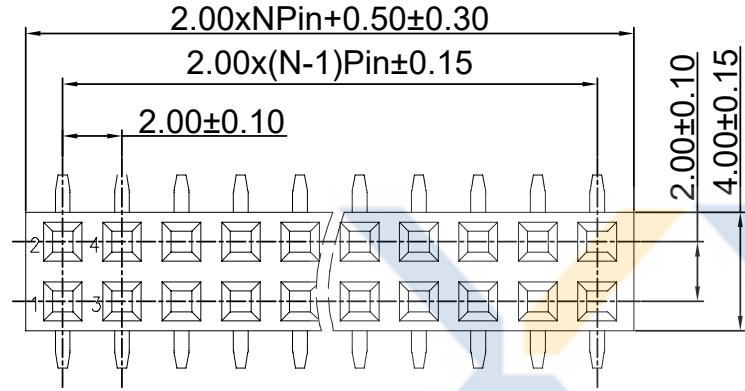

- SPEC.:
- Rated Current:1.5A AC,DC
 - Withstand Voltage:500V AC/minute
 - Insulation Resistance:1000MΩ min
 - Contact Resistance: 20mΩ Max
 - Temperature Range:-40℃~+105℃

- Material:
- Insulator Material:PA6T UL 94V-0
 - Contact Material:Brass
 - Finish:Gold-plated,over Nickel
 - Max. Processing Temp:260±5℃ for 5seconds

KBM20005-D XX X S V 5 A

D: Double row

Pin No.

包装方式:

T:TUBE (管装)

R:REEL (卷装)

P: PE (袋装)

A:TRAY (盒装)

Version



Mold No.

R:Right Angle

V:Vertical

S:SMT

D:DIP

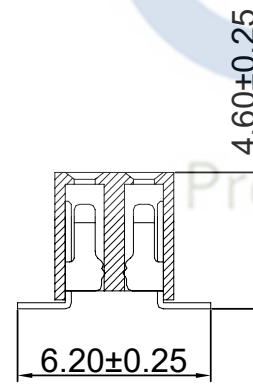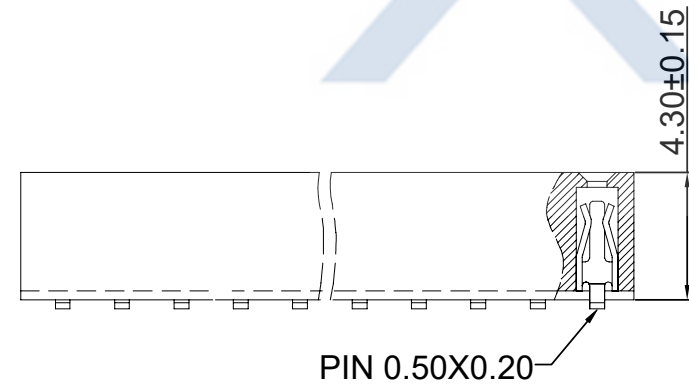

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2014-05-15		A	CHANGE HISTORY 變更歷史	KBM20005-DXXXSV5A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KBM20005-DXXXSV5A			
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位	mm
								APPROVED 核准	William	DWG NO. 圖號	PE2010015A	PRODUCT NAME 產品名稱

UNIT 單位	mm	PRODUCT NAME 產品名稱	PH:2.00 Dual Row Female SMT 180° H4.30mm
------------	----	----------------------	---