




DRAWING FOR CUSTOMER

- SPEC.:
- Rated Current:1.5A AC,DC
 - Withstand Voltage:500V AC/minute
 - Insulation Resistance:1000MΩ min
 - Contact Resistance: 20mΩ Max
 - Temperature Range:-40℃~+105℃


- Material:
- Insulator Material:PA6T UL 94V-0
 - Contact Material:Phosphor Bronze
 - Finish:Gold-plated,over Nickel
 - Max. Processing Temp:240℃ for 30-60seconds
(260℃ for 5seconds)

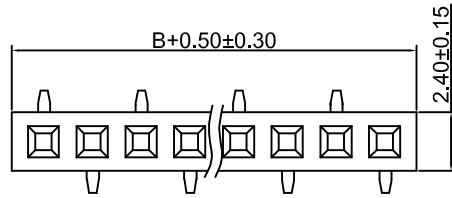



TYPE:A (右前左后)

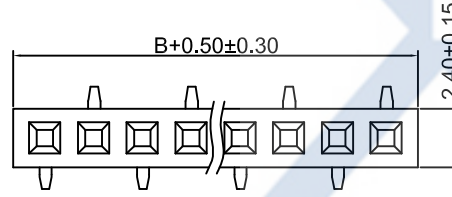

TYPE:B (左前右后)



Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)

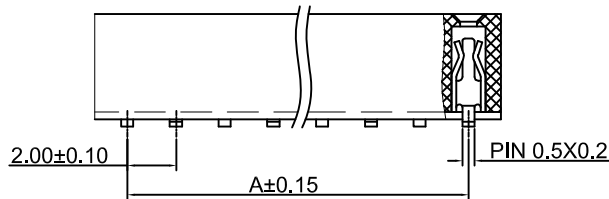

KBM20005-XX X S V 4 A

Pin No. _____

Version _____

Mold No. _____

R:Riht Angle
V:Vertical

包裝方式:
T:TUBE (管裝)
R:REEL (卷裝)
P: PE (袋裝)

S:SMT
D:DIP

Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B
1	—	2.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
2	2.00	4.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
3	4.00	6.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
4	6.00	8.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
5	8.00	10.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
6	10.00	12.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
7	12.00	14.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
8	14.00	16.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
9	16.00	18.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
10	18.00	20.00	20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	APPROVED 核准	PART NO. 料號	DWG NO. 圖號
2018-12-05	A		KBM20005-XXXSV4A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	Devin	THOMAS	KBM20005-XXXSV4A	PE181201A

UNIT 單位	mm	PRODUCT NAME 產品名稱	PH:2.00 Female Single Row SMT H4.30mm
------------	----	----------------------	---------------------------------------