


DRAWING FOR CUSTOMER

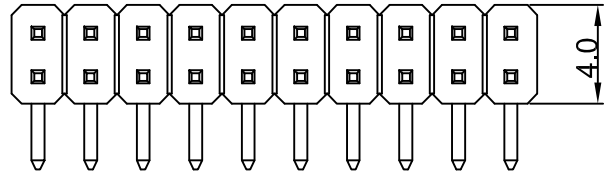

KB931-D XX X D R 3 A

Double row
Pin No.

Version
Mold No.




R:Right Angle
V:Vertical

S:SMT
D:DIP

包装方式：
T:TUBE (管装)
R:REEL (卷装)
P:PE (袋装)

- SPEC.:
- Rated Current:3A AC,DC
 - Withstand Voltage:500V AC/minute
 - Insulation Resistance:5000MΩ min
 - Temperature Range:-40℃~+105℃

- Notes:
- Insulator:PBT
 - Contact:Brass
 - Plating:Gold Plated

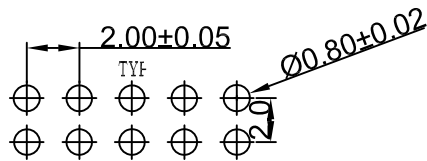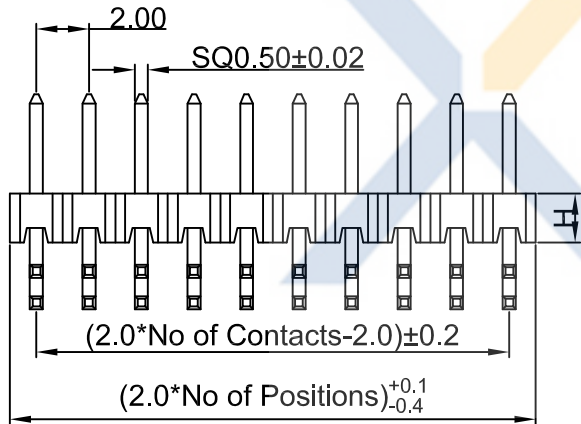

PCB LAYOUT

Plastic Base

Type	Dimension
H	2.0
PA	4.0
PB	5.2
PC	2.8

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-05-16		A	KB930-DXXXDR3A		Devin	KB931-DXXXDR3A		PART NO. 料號		UNIT	mm	PRODUCT NAME	DP2.0mm Wire To Board Double Row
DATE	VER	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE 公差	DRAWING 設計者	CHECKED 審查	APPROVED 核准	DWG NO. 圖號	PE200308A	mm	產品名稱	DIP Right Angle Wafer
日期	版本	變更歷史	修改後料號	變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	Devin	Thomas	William					