

DRAWING FOR CUSTOMER

KB931-D XX X D V 3 A

Double row

Pin No.

Version

Mold No.

包装方式:

T: TUBE (管装)

R: REEL (卷装)

P: PE (袋装)

R: Right Angle

V: Vertical

S: SMT




D: DIP

■SPEC.:


- Rated Current:3A AC,DC
- Withstand Voltage:500V AC/minute
- Insulation Resistance:5000MΩ min
- Temperature Range:-40℃~+105℃

■Notes:

- Insulator:PBT
- Contact:Brass
- Plating:Gold Plated

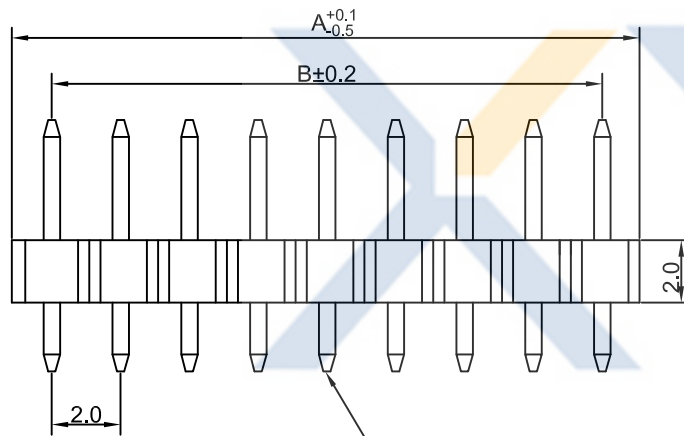

0.5±0.02 sq

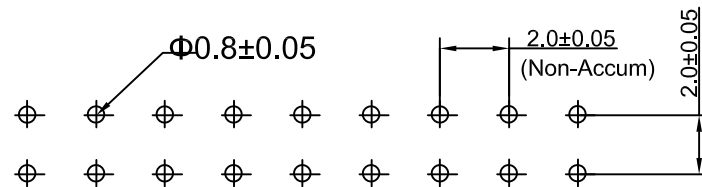

PCB Layout

Contacts Par row	Dimensions		Contacts Par row	Dimensions	
	A	B		A	B
2*1P	2.0	0	2*16P	32.0	30.0
2*2P	4.0	2.0	2*17P	34.0	32.0
2*3P	6.0	4.0	2*18P	36.0	34.0
2*4P	8.0	6.0	2*19P	38.0	36.0
2*5P	10.0	8.0	2*20P	40.0	38.0
2*6P	12.0	10.0	2*21P	42.0	40.0
2*7P	14.0	12.0	2*22P	44.0	42.0
2*8P	16.0	14.0	2*23P	46.0	44.0
2*9P	18.0	16.0	2*24P	48.0	46.0
2*10P	20.0	18.0	2*25P	50.0	48.0
2*11P	22.0	20.0	2*26P	52.0	50.0
2*12P	24.0	22.0	2*27P	54.0	52.0
2*13P	26.0	24.0	2*28P	56.0	54.0
2*14P	28.0	26.0	2*29P	58.0	56.0
2*15P	30.0	28.0	2*30P	60.0	58.0

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-05-16	A		KB930-DXXXDV3A	Devin
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者

TOLERANCE 公差	DRAWING 設計者	Devin
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas
	APPROVED 核准	William

KB931-DXXXDV3A	
PART NO. 料號	
DWG NO. 圖號	PE1707002A

UNIT 單位	mm
PRODUCT NAME 產品名稱	

DP2.0mm Wire To Board Double Row
DIP Vertical Wafer