


# DRAWING FOR CUSTOMER

Specifications:  
 Electrical  
 Rated Voltage: 250V AC,DC  
 Rated Current: 7A AC,DC  
 Withstand Voltage: 1500V AC/minute  
 Contact Resistance: 10m Ω (MAX.)  
 Insulation Resistance: 100M Ω (MIN.)  
 Temperature Range: -25°C~+85°C  
 Housing  
 Material: Nylon 66 UL 94V-0



**KB962- XX H L 3 A**



Pin No.

Version

H:Housing

Mold No.

With Lock

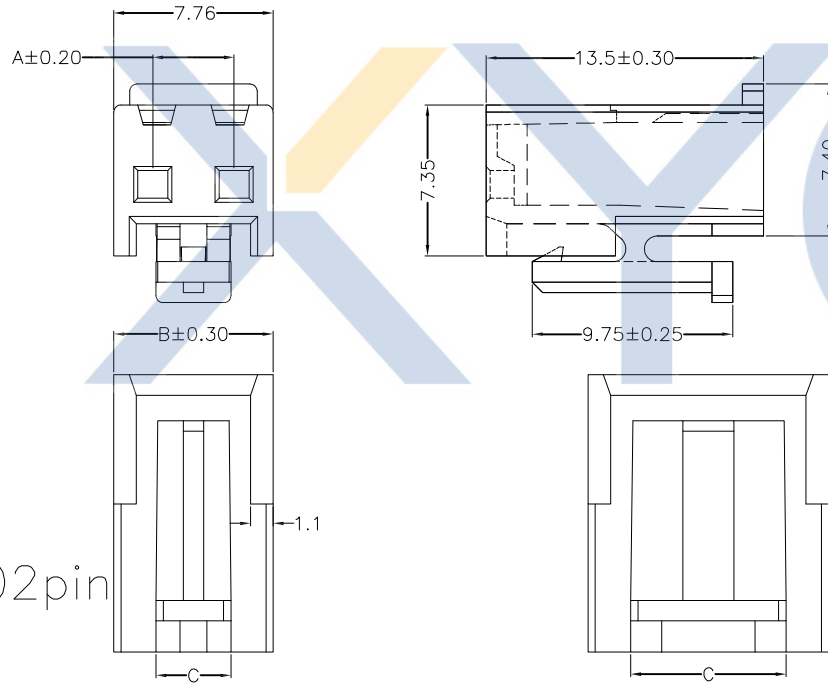

Precision Connectors

02pin

03-16pin

Poles	DIM		
	A	B	C
2	3.96	7.76	3.65
3	7.92	11.72	7.55
4	11.88	15.68	7.55
5	15.84	19.64	7.55
6	19.80	23.60	7.55
7	23.76	27.56	7.55
8	27.72	31.52	7.55
9	31.68	35.48	7.55
10	35.64	39.44	7.55
11	39.60	43.40	7.55
12	43.56	47.36	7.55
13	47.52	51.32	7.55
14	51.48	55.28	7.55
15	55.44	59.24	7.55
16	59.40	63.20	7.55

## XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2013-07-30		A		John		TOLERANCE 公差		DRAWING 设计者		John		KB962-XXHL3A		UNIT		mm		PRODUCT NAME		VH3.96 HSG With Lock	
DATE 日期		VER 版本		CHANGE HISTORY 变更历史		DRAWING 变更者		CHECKED 审查		Thomas		PART NO. 料号		DWG NO. 图号		PE3203A		产品名称			
						.X±0.30 .XX±0.20 .XXX±0.10		APPROVED 核准		William											