
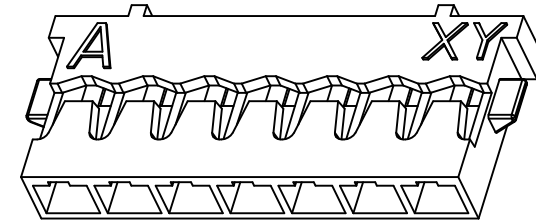


DRAWING FOR CUSTOMER

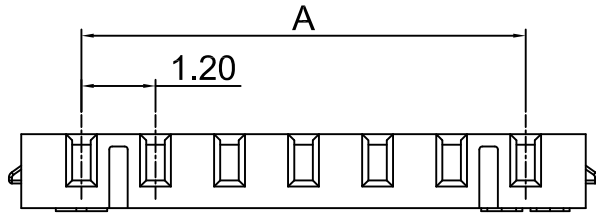

■SPEC.:





- Rated Voltage:50V AC,DC
- Rated Current:1.5A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator:C2-LCP;P6- PPA UL94V-0;
- Color:BK-Black;WH-White

KB1202-XXH1A-P6X-XX

Pin No.	Color
Housing	XYCO
Mold No.	Material
	Version

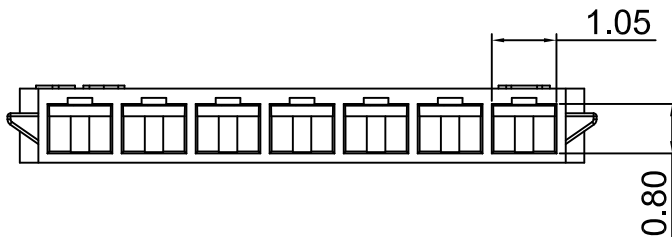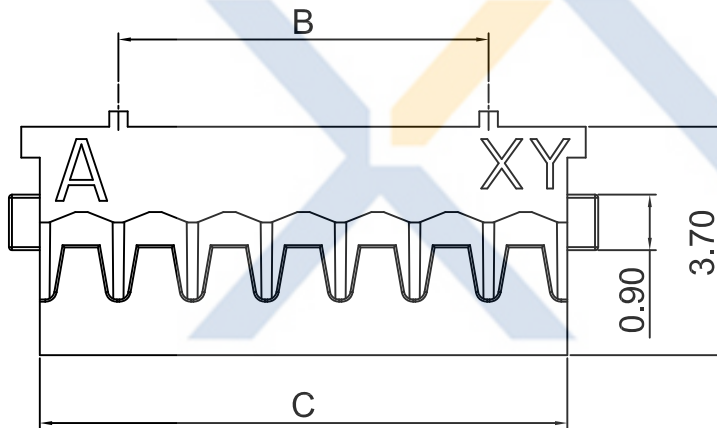

2P视图

Poles	Dimensions(mm)		
	A	B	C
02	1.20	---	2.55
03	2.40	1.20	3.75
04	3.60	2.40	4.95
05	4.80	3.60	6.15
06	6.00	4.80	7.35
07	7.20	6.00	8.55

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-07-16	A	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE 公差	DRAWING 設計者	Devin	KB1202-XXH1A-P6X-XX
DATE 日期	VER 版本	變更歷史	修改後料號	變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
1	2	3	4	5	6	7	8	9

UNIT 單位	mm	PRODUCT NAME 產品名稱	ACH PH1.20mm Wire To Board Housing
------------	----	----------------------	---------------------------------------