


DRAWING FOR CUSTOMER

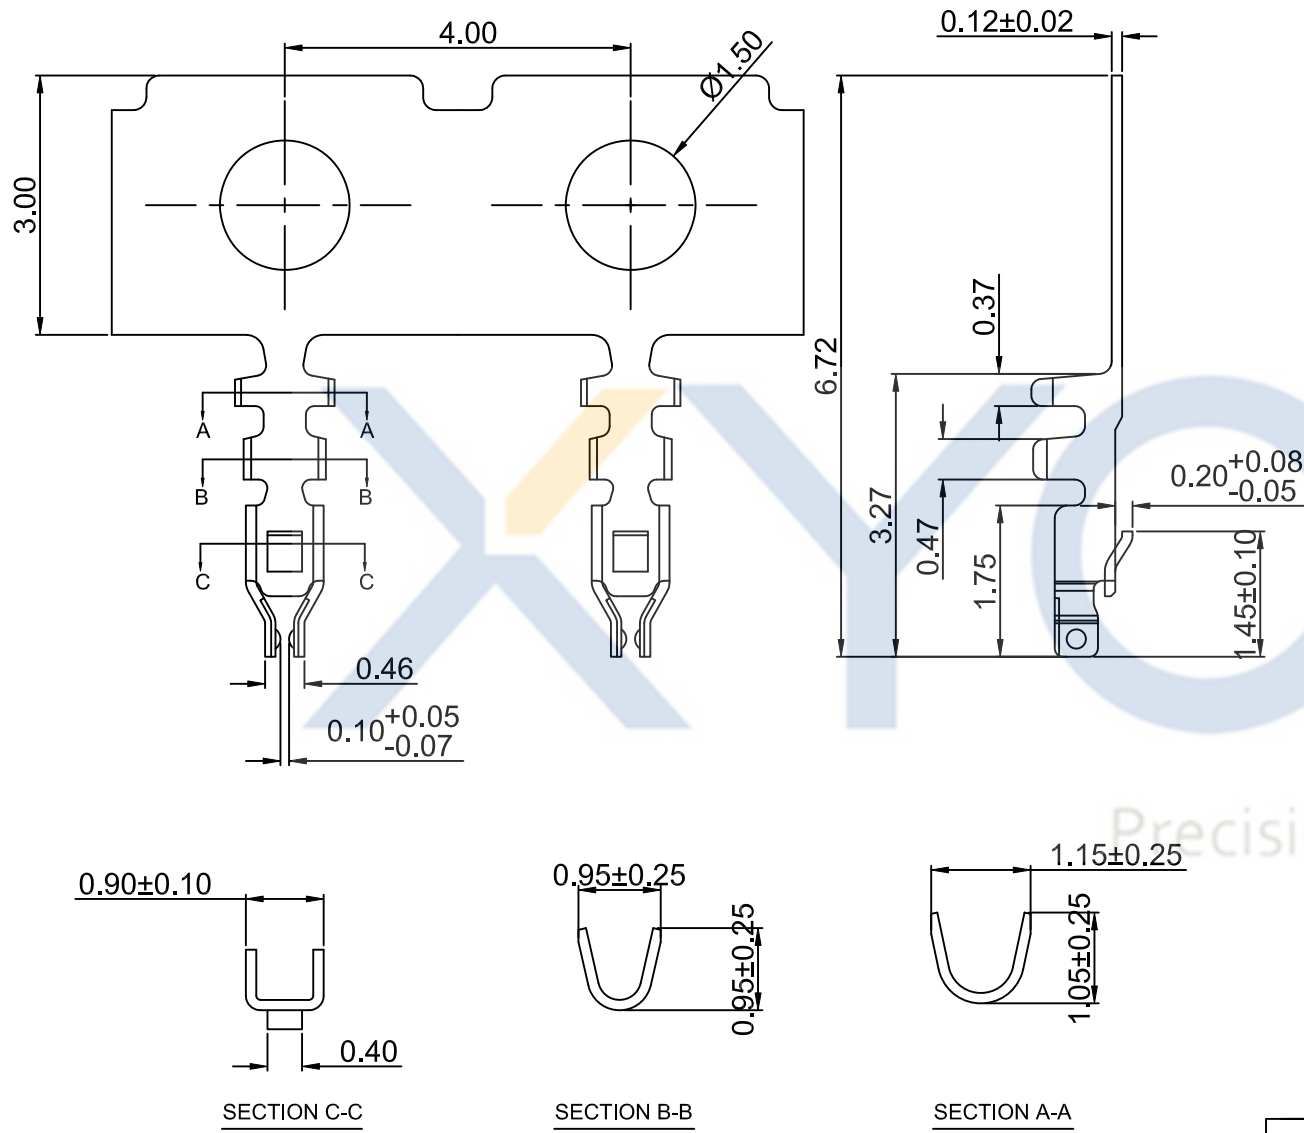

■SPEC.:

- Rated Voltage:50V AC,DC
- Rated Current:1.5A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃

■Terminal:

- Material:Phosphor Bronze
- Finish:Gold-flash over Nickel
- Applicable Wires:AWG#30~36
- QTY.:15KPCS/Reel

KB1202-X X T 1 A

- 1:All plated
- 2:Half plated

Plating

- 0:Tin-plat
- 1:Gold Flash
- 2:Gold Plat3u"
- 3:Gold Plat5u"
- 10:Gold Plat10u"
- 15:Gold Plat15u"

Version

Mold No.

Terminal

SECTION C-C

SECTION B-B

SECTION A-A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-07-16		A	KB1202-XXT1A		Devin	TOLERANCE 公差	DRAWING 设计者	Devin	KB1202-XXT1A		UNIT 单位		mm	PRODUCT NAME 产品名称		ACH PH1.20mm Wire To Board Terminal	
DATE 日期	VER 版本	CHANGE HISTORY 变更历史	CHANGED NAME 修改后料号	DRAWING 变更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 审查	APPROVED 核准	Thomas	William	DWG NO. 圖號	PE210807A						