
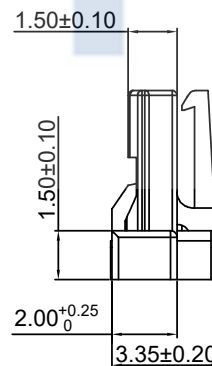
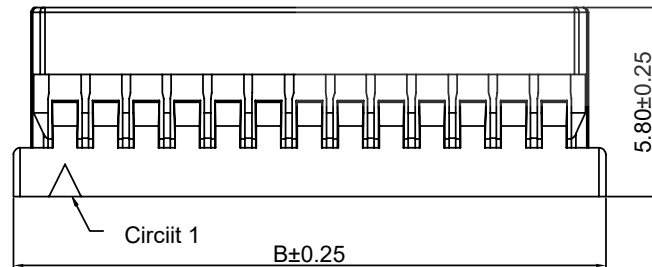
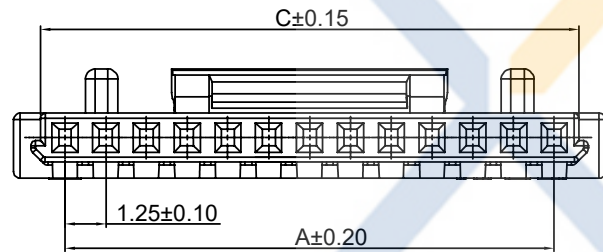
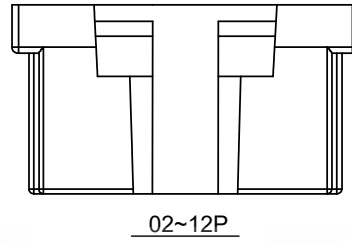
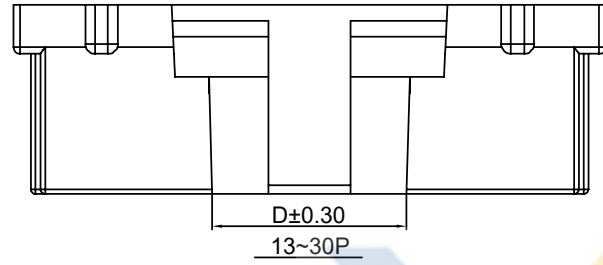


DRAWING FOR CUSTOMER

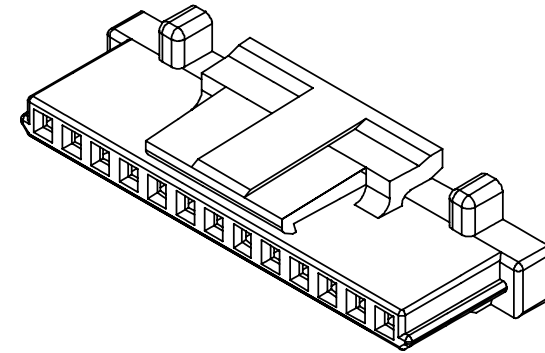

■SPEC.:

- Voltage Rating:150V AC/DC
- Current Rating:1A AC/DC
- Withstanding Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range:-35°C~+85°C

■Material:

- Insulator:PA66 UL94V-0
- Color:White

KB912- XX H L 2 A



Poles	Dimensions(mm)			
	A	B	C	D
02	1.25	4.40	2.75	1.10
03	2.50	5.65	4.00	1.95
04	3.75	6.90	5.25	2.60
05	5.00	8.15	6.50	3.20
06	6.25	9.40	7.75	3.20
07	7.50	10.65	9.00	3.20
08	8.75	11.90	10.25	3.20
09	10.00	13.15	11.50	3.20
10	11.25	14.40	12.75	3.20
11	12.50	15.65	14.00	4.70
12	13.75	16.90	15.25	4.70
13	15.00	18.15	16.50	4.70
14	16.25	19.40	17.75	4.70
15	17.50	20.65	19.00	4.70
20	23.75	26.90	25.25	4.70
25	30.00	33.15	31.50	5.70
30	36.25	39.40	37.75	5.70

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

				TOLERANCE 公差		DRAWING 設計者		Devin		KB912-XXHL2A	
2020-12-25		A		新版发行		KB912-XXHL2A		Devin		PART NO. 料號	
DATE 日期		VER 版本		CHANGE HISTORY 變更歷史		CHANGED NAME 修改後料號		DRAWING 變更者		DWG NO. 圖號	
										PE2903A	
										UNIT 單位	
										mm	
										PRODUCT NAME 產品名稱	
										DF14 PH1.25mm Wire To Board Housing with lock	

