




# DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:100V AC,DC
  - Rated Current:1A AC,DC
  - Withstand Voltage:300V AC/minute
  - Contact Resistance:30mΩ max
  - Insulation Resistance:500MΩ min
  - Temperature Range:-35℃~+85℃

- Material and finish
- Insulator:LCP,UL94V-0
  - Contact Pin:Copper alloy  
Finish:Gold-Plated on contact area  
Tin /Lead on solder area,over Nickel
  - Shell:Copper alloy
  - QTY.:2.5KPCS/Ree&1KPCS/Tube

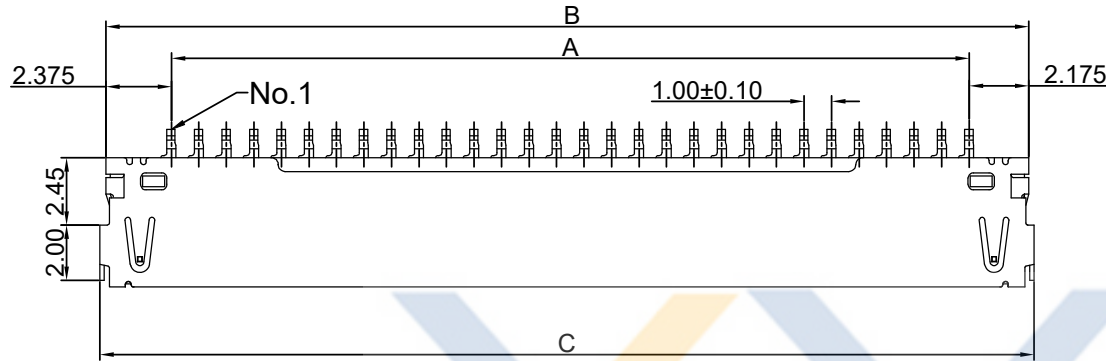


KB906-XX R S R 2 A

Pin No.      Version  
                    Mold No.

T:TUBE 管裝  
R:REEL 卷裝  
P:PE 袋裝

R:Right Angle  
V:Vertical

D:DIP  
S: SMT

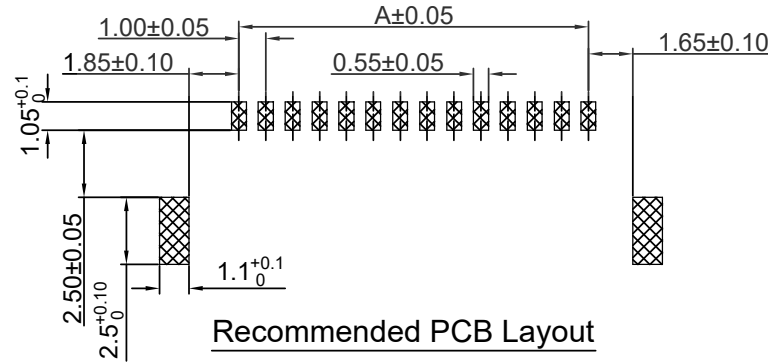

Poles	Dimensions(mm)		
	A	B	C
14	13.00	17.55	17.95
20	19.00	23.55	23.95
30	29.00	33.55	33.95

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2013-09-13	A		KB906-XXRSR2A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB906-XXRSR2A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位
						APPROVED 核准	William	DWG NO. 圖號	mm
								PE2506A	PRODUCT NAME 產品名稱

DF19 PH1.0mm SMT Right Angle Wafer