


# DRAWING FOR CUSTOMER

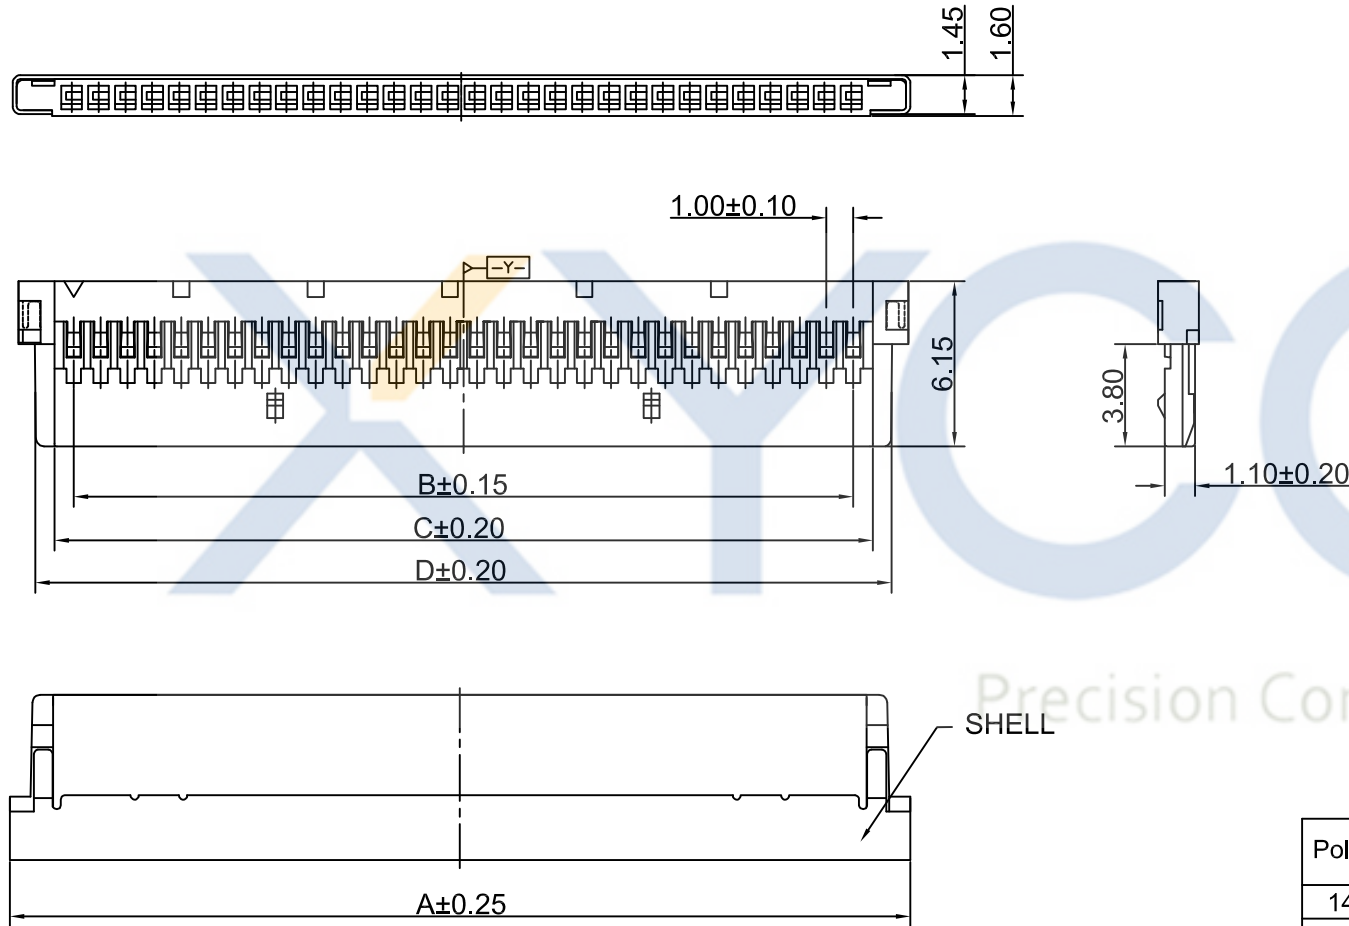

- SPEC.:
- Rated Voltage:100V AC,DC
  - Rated Current:1A AC,DC
  - Withstand Voltage:300V AC/minute
  - Contact Resistance:30mΩ max
  - Insulation Resistance:500MΩ min
  - Temperature Range:-35°C~+85°C

- Material:
- Insulator:PA66 UL94V-0  
Color :Natural
  - Shell:Stainless Steel

KB906-XX H 2 A

Pin No.

Version

Housing

Mold No.

| Poles | Dimensions(mm) |       |       |       |
|-------|----------------|-------|-------|-------|
|       | A              | B     | C     | D     |
| 14    | 17.50          | 13.00 | 14.44 | 15.90 |
| 20    | 23.50          | 19.00 | 20.44 | 21.90 |
| 30    | 33.50          | 29.00 | 30.44 | 31.90 |

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

| DATE       |    | VER  | CHANGE HISTORY | CHANGED NAME | DRAWING                             | TOLERANCE | DRAWING | DESIGNER    | PART NO.   | UNIT | mm                                  | PRODUCT NAME |
|------------|----|------|----------------|--------------|-------------------------------------|-----------|---------|-------------|------------|------|-------------------------------------|--------------|
| 日期         | 版本 | 變更歷史 | 修改後料號          | 變更者          | 公差                                  | 設計者       | 審核      | 圖號          | 料號         | 單位   | 產品名稱                                |              |
| 2020-05-25 | A  | 新模   | KB906-XXH2A    | Devin        | .X=±0.30<br>.XX=±0.20<br>.XXX=±0.10 | Devin     | Thomas  | KB906-XXH2A | PE1708007A | mm   | DF19 PH1.00mm Wire To Board Housing |              |
|            |    |      |                |              |                                     | William   |         |             |            |      |                                     |              |