


DRAWING FOR CUSTOMER

KB911-D XX X S V 5 A -P3-BGE




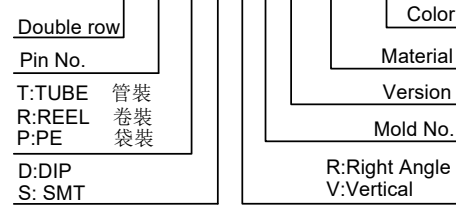


■SPEC.:

- Rated Voltage:150V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:30mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator(A) :P3-PA6T UL94V-0
Color:BGE-Beige
- Contact Pin(B):Brass
Finish:Gold-plated,over Nickel
- Solder Tab(C):Brass
Finish:Tin-plated,over Nickel
- Cap(D):PA6T UL94V-0

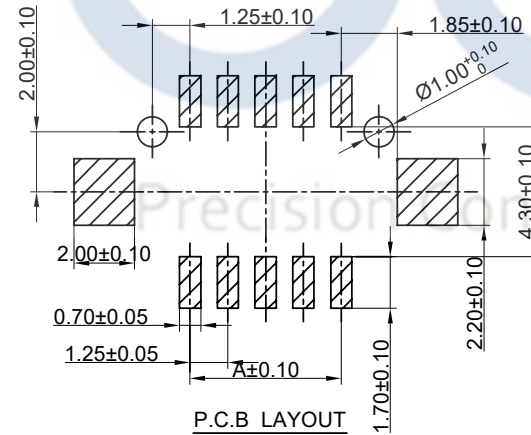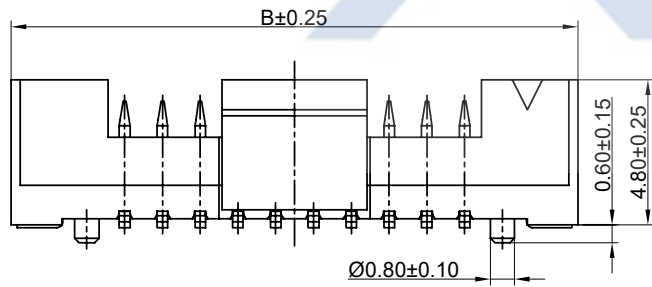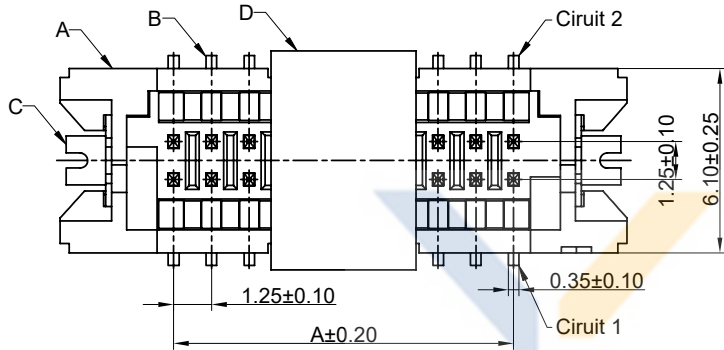

Poles	Dimensions(mm)	
	A	B
2*05	5.00	12.50
2*07	7.50	15.00
2*08	8.75	16.25
2*10	11.25	18.75
2*15	17.50	25.00
2*20	23.75	31.25

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-06-21		A		KB911-DXXXSV5A-P3-BGE		Devin		TOLERANCE 公差		DRAWING 設計者		Devin		KB911-DXXXSV5A-P3-BGE	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史		CHANGED NAME 修改後料號		DRAWING 變更者		.X=±0.30	.XX=±0.20	.XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號		UNIT 單位
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

DWG NO. 圖號	PE2107036A	mm	PRODUCT NAME 產品名稱	DF13 PH1.25mm Wire To Board Double Row SMT Vertical Wafer
------------	------------	----	-------------------	--