DRAWING FOR CUSTOMER

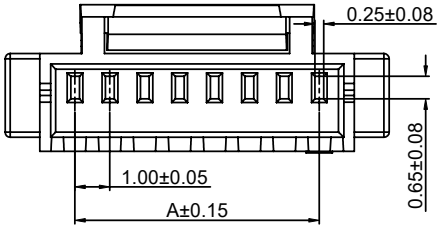



■Specifications:
- ●Rated Voltage: 50V AC,DC
- ●Rated Current: 1A AC,DC
- ●Withstand Voltage: 500V AC/minute
- ●Contact Resistance: 20mΩ max
- ●Insulation Resistance: 100MΩ min
- ●Temperature Range: -25°C~+85°C

■Material:
- ●Insulation: PA66 UL94-V0
  Color: White

KB901- XX H B L 7 A -HF

- Pin No.
- Housing
- Back buckle
- With Lock
- Halogen Free
- Version
- Mold No.

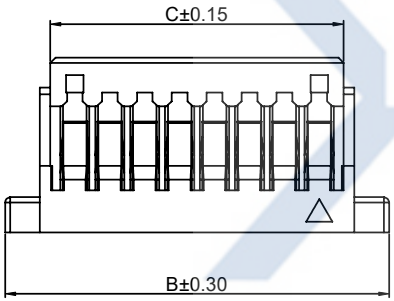



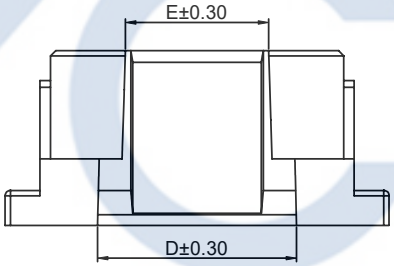

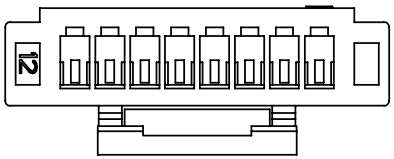

Poles	Dimension (mm)				
	A	B	C	D	E
03	2.00	6.00	3.40	3.70	2.10
04	3.00	7.00	4.40	4.70	3.10
05	4.00	8.00	5.40	5.70	4.10
06	5.00	9.00	6.40	5.70	4.10
07	6.00	10.00	7.40	5.70	4.10
08	7.00	11.00	8.40	6.70	5.10
09	8.00	12.00	9.40	6.70	5.10
10	9.00	13.00	10.40	6.70	5.10
11	10.00	14.00	11.40	6.70	5.10
12	11.00	15.00	12.40	5.70	4.10

Precision Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2015-08-05	A		KB901-XXHBL7A-HF	Devin

TOLERANCE 公 差	DRAWING 設計者	Devin	KB901-XXHBL7A-HF		UNIT 單位	mm	PRODUCT NAME 產品名稱	SH1.0mm Wire To Board Housing With Back Lock
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號					
	APPROVED 核准	William	DWG NO. 圖號	PE180806A				