DRAWING FOR CUSTOMER

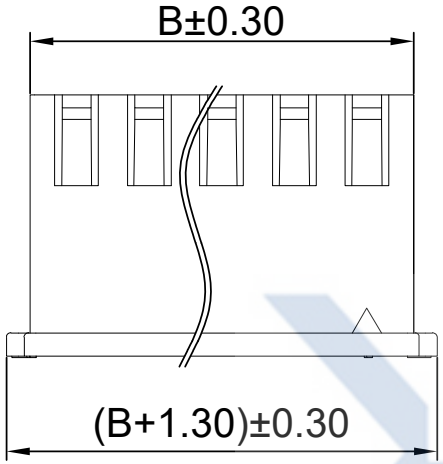

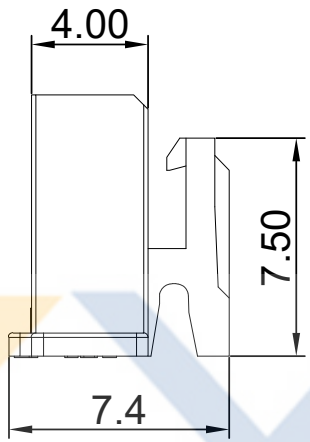

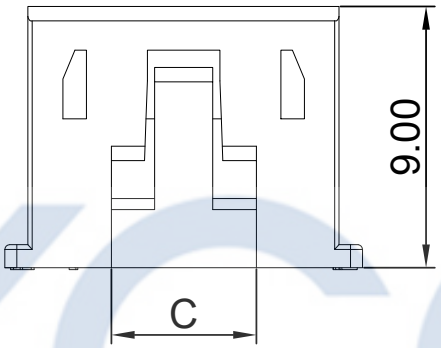

■SPEC.:
- ●Rated Voltage:250V AC,DC
- ●Rated Current:3A AC,DC
- ●Withstand Voltage:1000V AC/minute
- ●Contact Resistance:20mΩ max
- ●Insulation Resistance:1000MΩ min
- ●Temperature Range:-25℃~+85℃

■Material:
- ●Insulator:PA66 UL94V-0
  Color:White

KB952-X X H L 2 A

- Pin No.
- Housing
- With Lock
- Version
- Mold No.

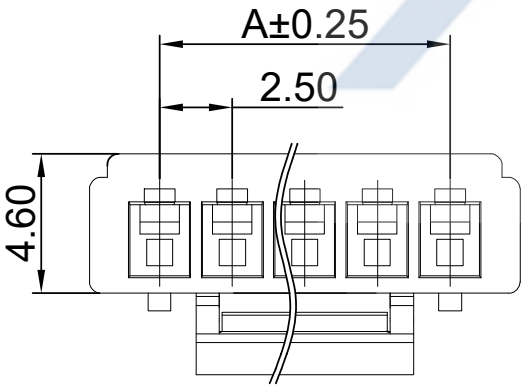

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.50	5.70	5.20	10	22.50	25.70	15.00
03	5.00	8.20	4.20	11	25.00	28.20	15.00
04	7.50	10.70	5.00	12	27.50	30.70	15.00
05	10.00	13.20	5.00	13	30.00	33.20	15.00
06	12.50	15.70	7.50	14	32.50	35.70	15.00
07	15.00	18.20	10.00	15	35.00	38.20	15.00
08	17.50	20.70	15.00	16	37.50	40.70	15.00
09	20.00	23.20	15.00	---	---	---	---

XYCO Precision Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2014-08-16	A		KB952-XXHL2A	Devin

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者	Devin	KB952-XXHL2A	
CHECKED 審查	Thomas	PART NO. 料號	
APPROVED 核准	William	DWG NO. 圖號	PE3608A

UNIT 單位: mm

PRODUCT NAME 產品名稱: XHB PH2.5mm Wire To Board Connector Housing with lock