


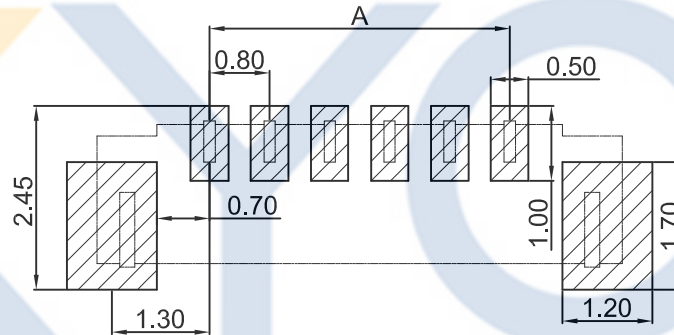
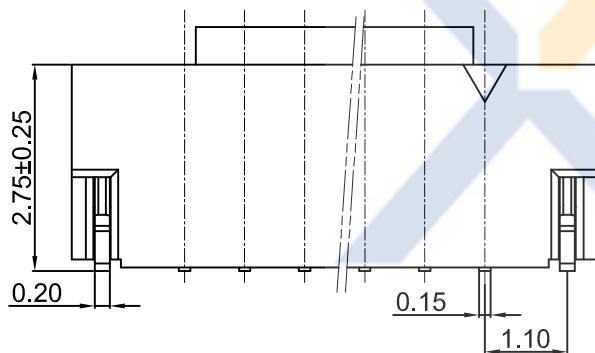


DRAWING FOR CUSTOMER




- SPEC.:
- Rated Voltage: 30V AC,DC
 - Rated Current: 0.5A
 - Withstand Voltage: 200V AC/minute
 - Contact Resistance: 20mΩ max
 - Insulation Resistance: 100MΩ min
 - Temperature Range: -25°C~+85°C

- Material:
- Insulator(A): C1-LCP UL94V-0
BGE-Beige
 - Contact Pin(B): Phosphor Bronze
Finish:Matted Sn-Plated,over Nickel
 - Solder Tab(C):Phosphor Bronze
Finish:Matted Sn-Plated,over Nickel
 - Cap(D):LCP UL94V-0

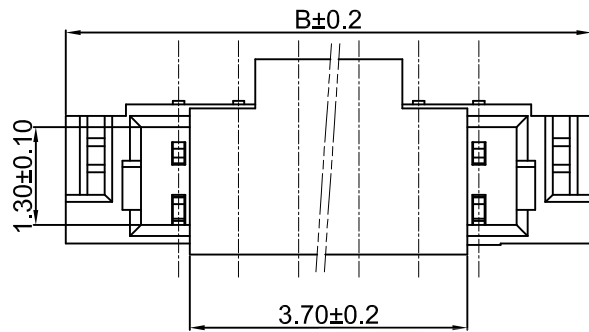

PCB LAYOUT

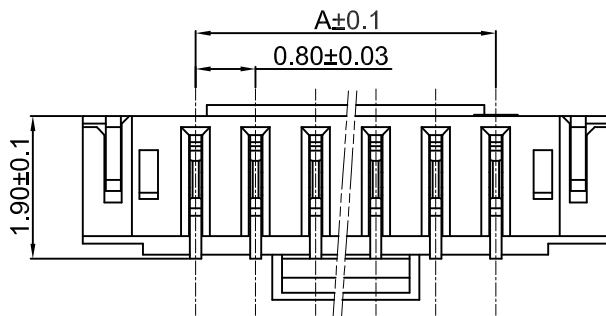

KB801-X X X S V S 6 A -C1-BGE

Pin No. Color
 P:PE 袋装 LCP
 R:REEL 卷装 Version
 T:TUBE 管装 Mold No.
 S:SMT G:GOLD FLASH
 D:DIP S:MATTE TIN
 R:Right angle
 V:Verical

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	0.8	3.8	14	10.4	13.4
03	1.6	4.6	15	11.2	14.2
04	2.4	5.4	16	12.0	15.0
05	3.2	6.2	17	12.8	15.8
06	4.0	7.0	18	13.6	16.6
07	4.8	7.8	19	14.4	17.4
08	5.6	8.6	20	15.2	18.2
09	6.4	9.4	21	16.0	19.0
10	7.2	10.2	22	16.8	19.8
11	8.0	11.0	23	17.6	20.6
12	8.8	11.8	24	18.4	21.4
13	9.6	12.6	25	19.2	22.2

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

TOLERANCE 公差		DRAWING 設計者	Devin		KB801-XXXSVS6A-C1-BGE	
.X=±0.30	CHECKED 審查	Thomas	PART NO. 料號		UNIT 單位	mm
.XX=±0.20	APPROVED 核准	William	DWG NO. 圖號	PRODUCT NAME 產品名稱		
.XXX=±0.10					SURS PH0.80mm Wire To Board SMT Verical Wafer	

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2016-11-30	A		KB801-XXXSVS6A-C1-BGE	Devin