
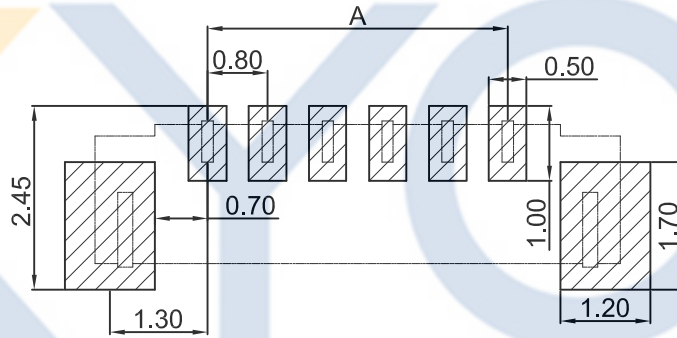

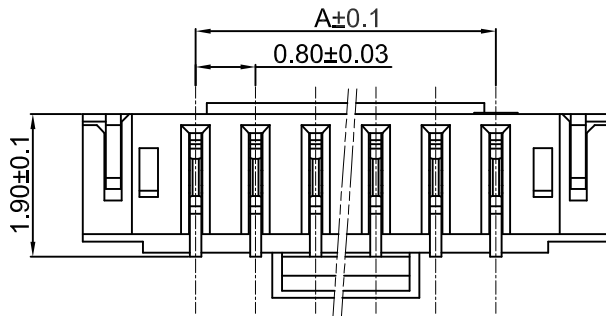
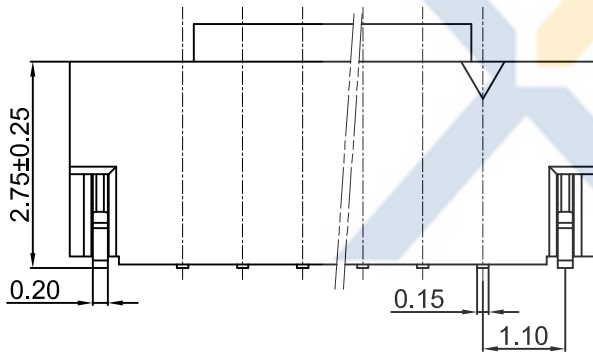



# DRAWING FOR CUSTOMER

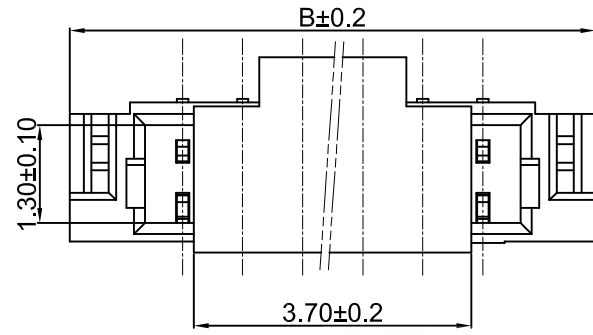

PCB LAYOUT

**KB802-X X X S V S 6 A -C1-BGE**

Pin No.	Color
P:PE 袋装	LCP
R:REEL 卷装	Version
T:TUBE 管装	Mold No.
S:SMT	G:GOLD FLASH
D:DIP	S:MATTE TIN
R:Right angle	
V:Verical	



■SPEC.:

- Rated Voltage: 30V AC,DC
- Rated Current: 0.5A
- Withstand Voltage: 200V AC/minute
- Contact Resistance: 20mΩ max
- Insulation Resistance: 100MΩ min
- Temperature Range: -25°C~+85°C

■Material:

- Insulator(A): C1-LCP UL94V-0  
BGE-Beige
- Contact Pin(B): Phosphor Bronze  
Finish:Matted Sn-Plated,over Nickel
- Solder Tab(C):Phosphor Bronze  
Finish:Matted Sn-Plated,over Nickel
- Cap(D):LCP UL94V-0

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	0.8	3.8	14	10.4	13.4
03	1.6	4.6	15	11.2	14.2
04	2.4	5.4	16	12.0	15.0
05	3.2	6.2	17	12.8	15.8
06	4.0	7.0	18	13.6	16.6
07	4.8	7.8	19	14.4	17.4
08	5.6	8.6	20	15.2	18.2
09	6.4	9.4	21	16.0	19.0
10	7.2	10.2	22	16.8	19.8
11	8.0	11.0	23	17.6	20.6
12	8.8	11.8	24	18.4	21.4
13	9.6	12.6	25	19.2	22.2

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2016-11-30		A		KB802-XXXSVS6A-C1-BGE		Devin		KB802-XXXSVS6A-C1-BGE	
DATE	VER	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE	DRAWING	Devin	PART NO. 料號	
日期	版本				公差	設計者		UNIT	Thomas
CHANGE HISTORY		CHANGED NAME		DRAWING	APPROVED	William	DWG NO.	圖號	
日期	版本	變更歷史	修改後料號	變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	核准	圖號		圖號