
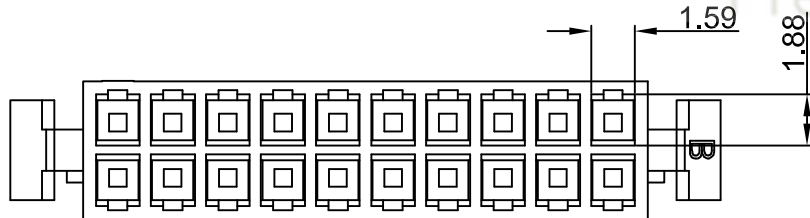
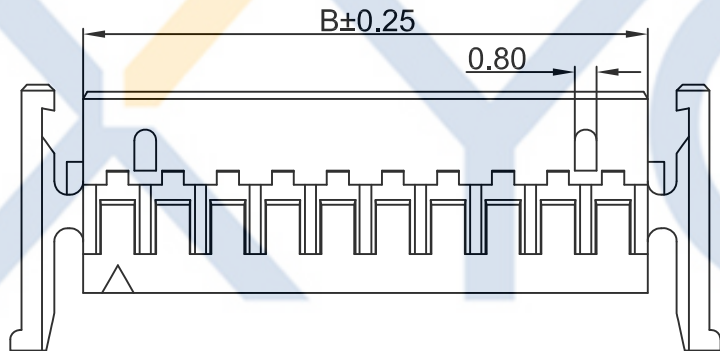
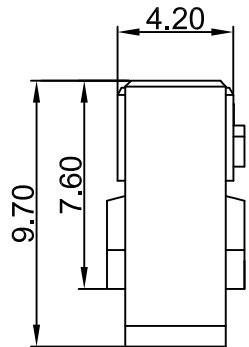


# DRAWING FOR CUSTOMER

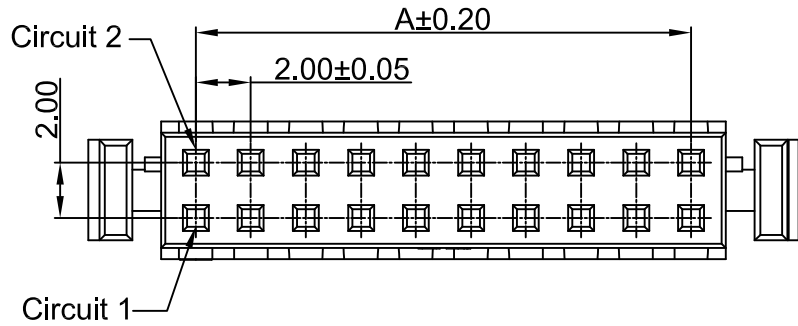

■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:3A AC,DC
- Withstand Voltage:800V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator:PA66 UL94V-0
- Color:White

KB932-D XX H L 4 A

Double row Pin No. Housing      Version Mold No. With Lock

Poles	Dimensions(mm)	
	A	B
2X02	2.00	4.50
2X03	4.00	6.50
2X04	6.00	8.50
2X05	8.00	10.50
2X06	10.00	12.50
2X07	12.00	14.50
2X08	14.00	16.50
2X09	16.00	18.50
2X10	18.00	20.50
2X11	20.00	22.50
2X12	22.00	24.50
2X13	24.00	26.50
2X14	26.00	28.50
2X15	28.00	30.50
2X16	30.00	32.50
2X17	32.00	34.50
2X18	34.00	36.50
2X19	36.00	38.50
2X20	38.00	40.50

**XYCO** 东莞市轩业电子科技有限公司  
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者 CHECKED 審查 APPROVED 核准	Devin Thomas William	KB932-DXXHL4A	PART NO. 料號	DWG NO. 圖號	PE3605A
2016-11-18	A		KB932-DXXHL4A	Devin							

UNIT 單位	mm	PRODUCT NAME 產品名稱	PHD PH2.0mm Wire To Board Housing With Lock
------------	----	----------------------	--