

DRAWING FOR CUSTOMER


- SPEC.:**
 ●Rated Voltage:100V AC,DC
 ●Rated Current:2A AC,DC
 ●Withstand Voltage:500V AC/minute
 ●Contact Resistance:30mΩ max
 ●Insulation Resistance:500MΩ min
 ●Temperature Range:-25℃~+85℃

- Material:**
 ●Insulator:B1-PA66 UL94V-0
 NB1-PA66 UL94V-0 HF
 Color:WH-White

XY15004-D X X H L 2 A -XX -WH

Double row Color
 Pin No. Material
 Housing Version
 With Lock Mold No.

Poles	Dimensions(mm)		
	A	B	C
2X05	7.50	6.00	11.20
2X06	9.00	7.50	12.70
2X07	10.50	9.00	14.20
2X08	12.00	10.50	15.70
2X09	13.50	12.00	17.20
2X10	15.00	13.50	18.70
2X11	16.50	15.00	20.20
2X12	18.00	16.50	21.70
2X13	19.50	18.00	23.20
2X14	21.00	19.50	24.70
2X15	22.50	21.00	26.20
2X16	24.00	22.50	27.70
2X17	25.50	24.00	29.20
2X18	27.00	25.50	30.70
2X19	28.50	27.00	32.20
2X20	30.00	28.50	33.70

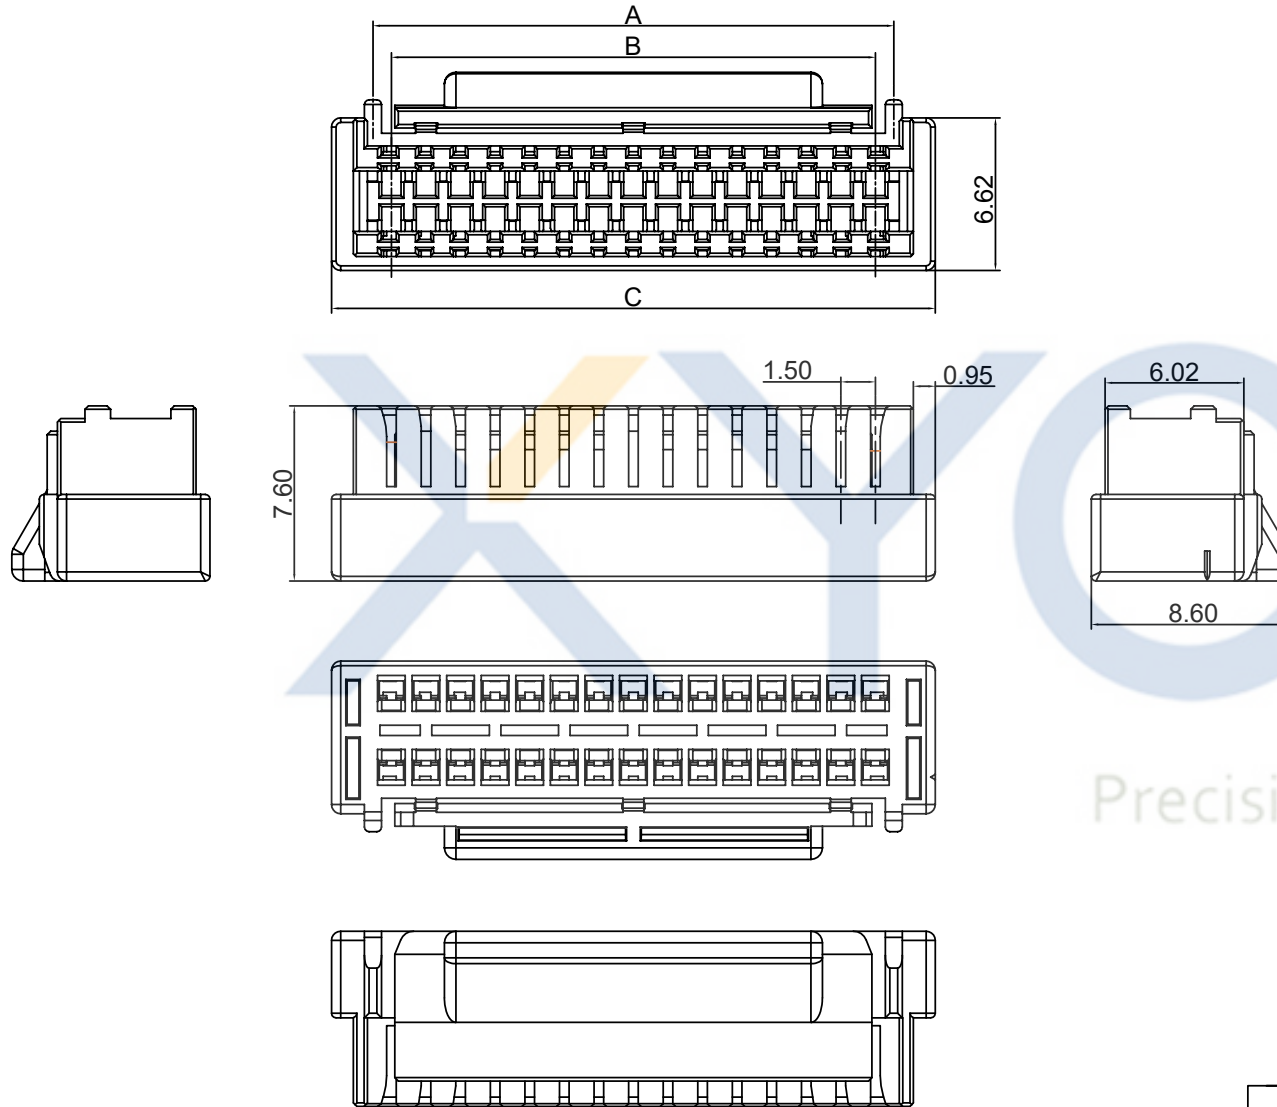

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2021-08-20	A		XY15004-DXXHL2A-XX-WH	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	XY15004-DXXHL2A-XX-WH
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE210805A

UNIT 單位	mm	PRODUCT NAME 產品名稱	ZPD PH1.50mm Wire To Board Double Row Housing With Lock
------------	----	----------------------	--