


DRAWING FOR CUSTOMER

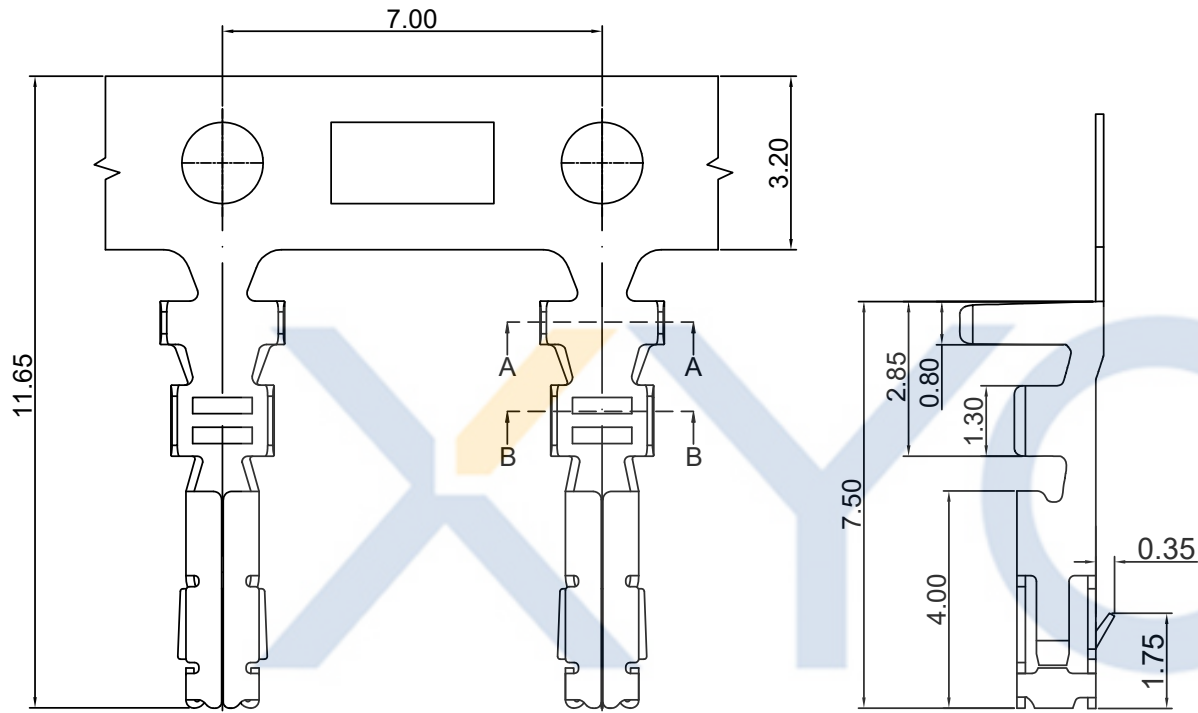

- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:3A AC,DC
 - Withstand Voltage:800V AC/minute
 - Contact Resistance:10mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-25°C~+85°C




- Terminal:
- Material:Phosphor Bronze
 - Finish:Tin/Gold-plated,over Nickel
 - Applicable wire: (Reference table 1)
 - QTY.:5KPCS/Plate

XY20008-X X T X 2 A

1:All plated
2:Half plated

Plating
0: Tin-plat
1: Gold Flash
2: Gold Plat3u"
3: Gold Plat5u"

Version
Mold No.
Terminal
A:Low Foot
B:High Foot
C:Middle Foot



Section:B-B

Section:A-A

TABLE 1:

PART NO.	A	B	C	D	Wire Range	Insulation O.D.
XY20008-XXTB2A	2.30	2.70	1.90	1.50	AWG#22~#26	1.50mm(max)
XY20008-XXTC2A	2.20	2.40	1.65	1.30	AWG#24~#28	1.40mm(max)
XY20008-XXTA2A	2.00	1.85	1.15	1.10	AWG#26~#30	1.30mm(max)

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	XY20008-XXTX2A
2020-11-22	A		XY20008-XXTX2A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號 PE211108A

UNIT 單位	mm	PRODUCT NAME 產品名稱	PUDP PH2.00mm Wire To Board Terminal
mm			