

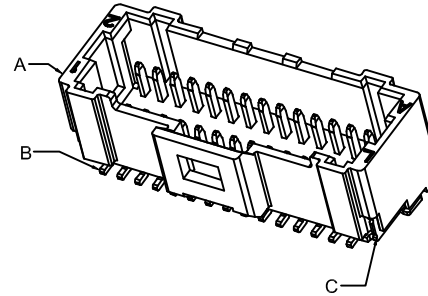
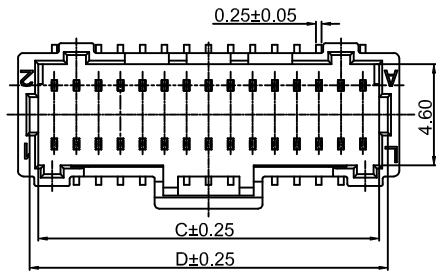


DRAWING FOR CUSTOMER

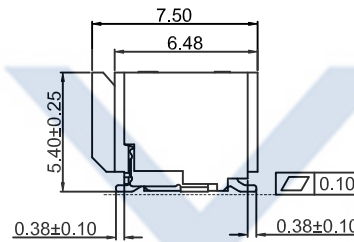

- SPEC.:
- Rated Voltage:50V AC,DC
 - Rated Current:1.0A AC,DC
 - Withstand Voltage:250V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator(A):P1-PA9T
Color:NAT-Natural
 - Contact PIN(B): Phosphor Bronze
Finish:Matted Gold-Plated;over Nickel
 - Solder tab(C):Brass
Finish:Matte Sn-Plated;over Nickel
 - CAP(D):PA9T UL94V-0
Color:Natural

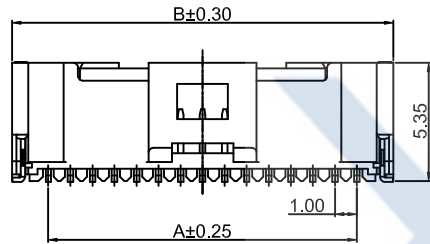


KB9907-D XX X S V 6 A -P1-NAT

Double row Pin No. Color Material Version Mold No.



T:TUBE 管裝
R:REEL 卷裝
P:PE 袋裝

D:DIP
S: SMT

R:Right Angle
V:Vertical

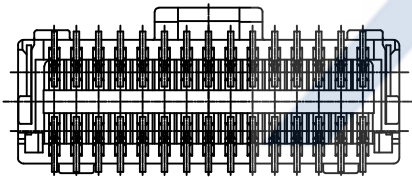

WITH CAP

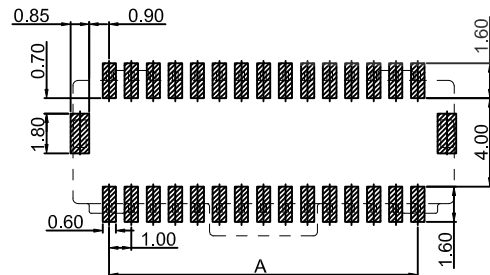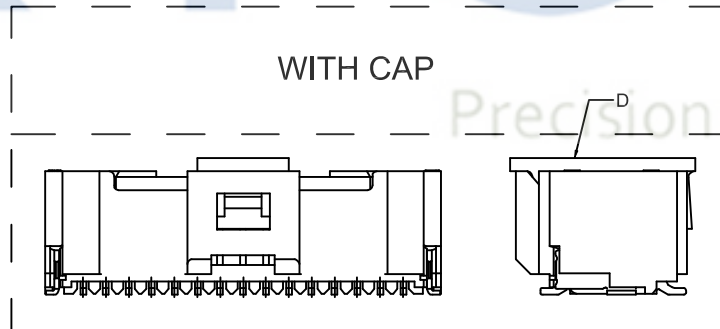

RECOMMENDED P.C.B LAYOUT

TOLERANCE UNSPECIFIED ±0.05mm

Poles	Dimensions(mm)			
	A	B	C	D
2X10P	9.00	12.30	10.45	11.25
2X15P	14.00	17.30	15.45	16.25
2X20P	19.00	22.30	20.45	21.25
2X25P	24.00	27.30	25.45	26.25

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2017-09-15		A	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB9907-DXXXSV6A-P1-NAT		UNIT 單位	mm	PRODUCT NAME 產品名稱	501190 PH1.00mm Wire To Board SMT Vertical Wafer
DATE 日期	VER 版本	KB9907-DXXXSV6A-P1-NAT				Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號				
								APPROVED 核准	William	DWG NO. 圖號				