




# DRAWING FOR CUSTOMER

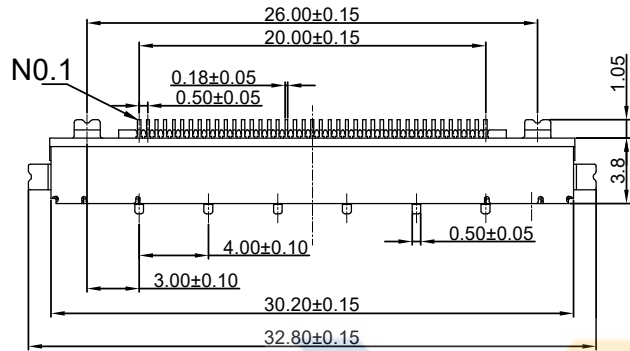


■SPEC.:

- Rated Voltage:200V AC,DC
- Rated Current:0.8A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-40℃~+80℃


■Material:

- Insulator: LCP HF UL 94V-0,Black
- Contact Pin:Copper Alloy  
Finish:Gold-Plated,over Nickel
- Shell:Stainless steel  
Finish:Matte Tin-Plated,over Nickel
- Q'TY: 1250PCS/Reel

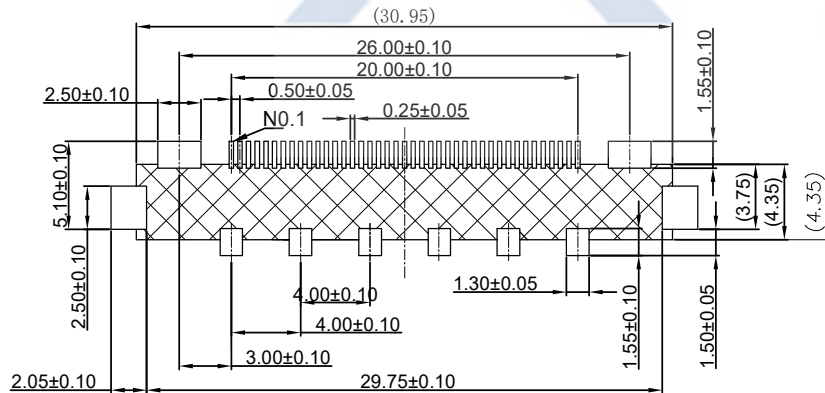

RECOMMENDED P.C.B LAYOUT

Precision Components KB904-41 X S R 3 A

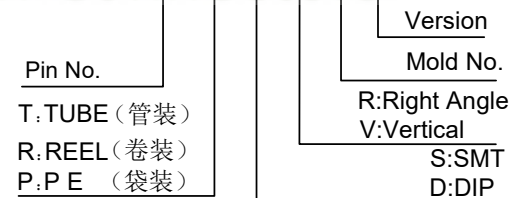

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2024-03-20	A-1	旧模老化, 开设新模, 产品优化	KB904-41XSR3A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB904-41XSR3A	UNIT 單位	mm	PRODUCT NAME 產品名稱	FI-RE PH0.5 Wire to board Right Angle SMT Wafer
2016-12-15	A		KB904-41XSR3A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號				
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE2403003A			