


DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:3A AC,DC
 - Withstand Voltage:1500V AC/minute
 - Contact Resistance:10mΩ max
 - Insulation Resistance:500MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator:PA66 UL94V-2
 - Color:BK-Black

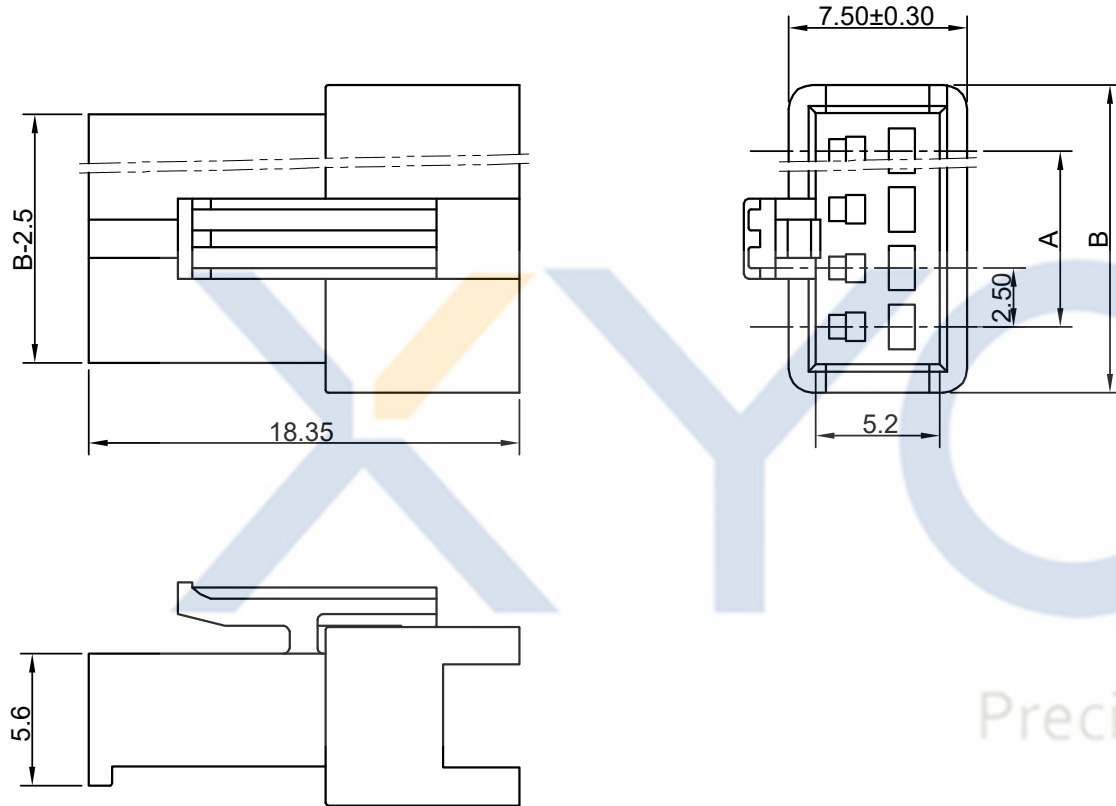

KB942-XX H L 3 A -BK

Color
Version
Pin No.
Mold No.
Housing
With Lock

Poles	Dimensions(mm)	
	A	B
02	2.50	8.1
03	5.00	10.6
04	7.50	13.1
05	10.00	15.6
06	12.50	18.1
07	15.00	20.6
08	17.50	23.1
09	20.00	25.6
10	22.50	28.1
11	25.00	30.6
12	27.50	33.1
13	30.00	35.6
14	32.50	38.1
15	35.00	40.6
16	37.50	43.1

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2013-09-13	A		KB942-XXHL3A-BK	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB942-XXHL3A-BK	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
						APPROVED 核准	William	DWG NO. 圖號	PE2504A

UNIT 單位	mm	PRODUCT NAME 產品名稱	SM-NA PH2.5mm Wire To Wire Housing with Lock
------------	----	----------------------	---