
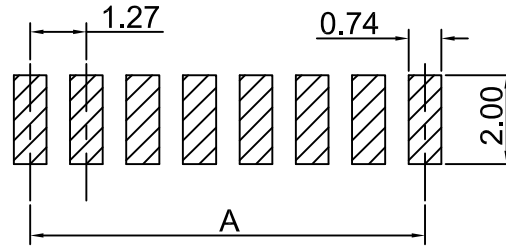


# DRAWING FOR CUSTOMER

- SPEC.:
- Rated Current:1.0A AC,DC
  - Withstand Voltage:500V AC/minute
  - Insulation Resistance:1000MΩ min
  - Contact Resistance: 20mΩ Max
  - Temperature Range:-40℃~+105℃

- Material:
- Insulator Material:PA6T UL 94V-0
  - Contact Material:Brass
  - Finish:Gold-plated,over Nickel
  - Max. Processing Temp:240℃ for 30-60seconds  
(260℃ for 5seconds)

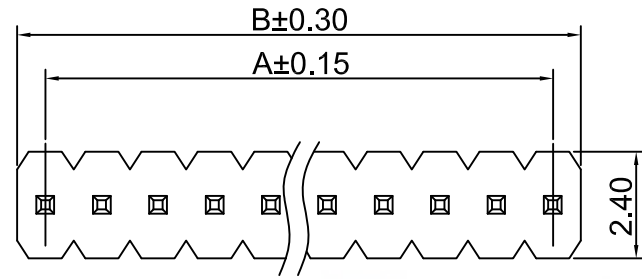

Recommended P.C.Board  
Hole Layout  
(Tolerance:±0.05)

KBP12704-XX X S R 4 A

Pin No.

Version

Mold No.

包装方式:

T:TUBE (管装)

R:REEL (卷装)



P: PE (袋装)

R:Ritht Angle

V:Vertical

S:SMT


D:DIP

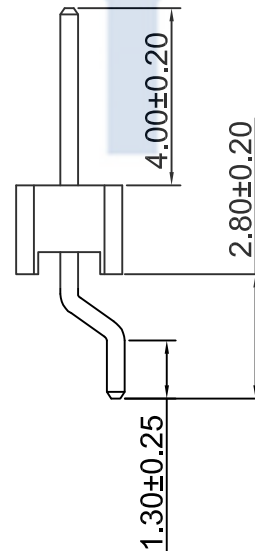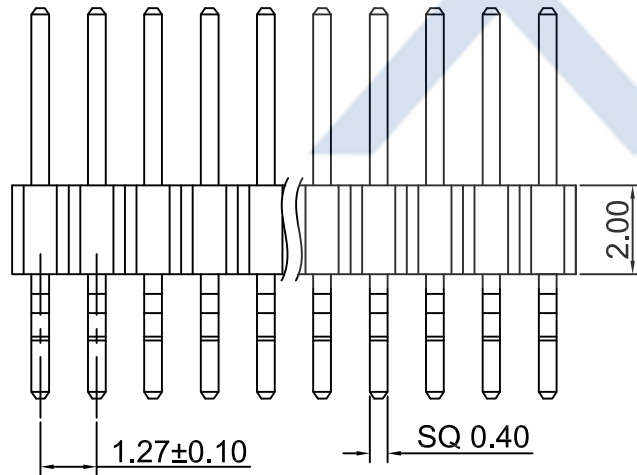

Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B
1	—	—	11	12.70	13.97	21	25.40	26.67	31	38.10	39.37	41	50.80	52.07
2	1.27	2.54	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64	42	52.07	53.34
3	2.54	3.81	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91	43	53.34	54.61
4	3.81	5.08	14	16.51	17.78	24	29.21	30.48	34	41.91	43.18	44	54.61	55.88
5	5.08	6.35	15	17.78	19.05	25	30.48	31.75	35	43.18	44.45	45	55.88	57.15
6	6.35	7.62	16	19.05	20.32	26	31.75	33.02	36	44.45	45.72	46	57.15	58.42
7	7.62	8.89	17	20.32	21.59	27	33.02	34.29	37	45.72	46.99	47	58.42	59.69
8	8.89	10.16	18	21.59	22.86	28	34.29	35.56	38	46.99	48.26	48	59.69	60.96
9	10.16	11.43	19	22.86	24.13	29	35.56	36.83	39	48.26	49.53	49	60.96	62.23
10	11.43	12.70	20	24.13	25.40	30	36.83	38.10	40	49.53	50.80	50	62.23	63.50

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	APPROVED 核准	KBP12704-XXXSR4A	
2017-11-05	A		KBP12704-XXXSR4A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	Devin	Thomas	PART NO. 料號	
							William	DWG NO. 圖號	PE171103A



UNIT  
單位 mm

PRODUCT NAME  
產品名稱

PH:1.27 Male Single Row SMT W2.40  
PA4.00 PB2.00 单塑贴板长度1.30