
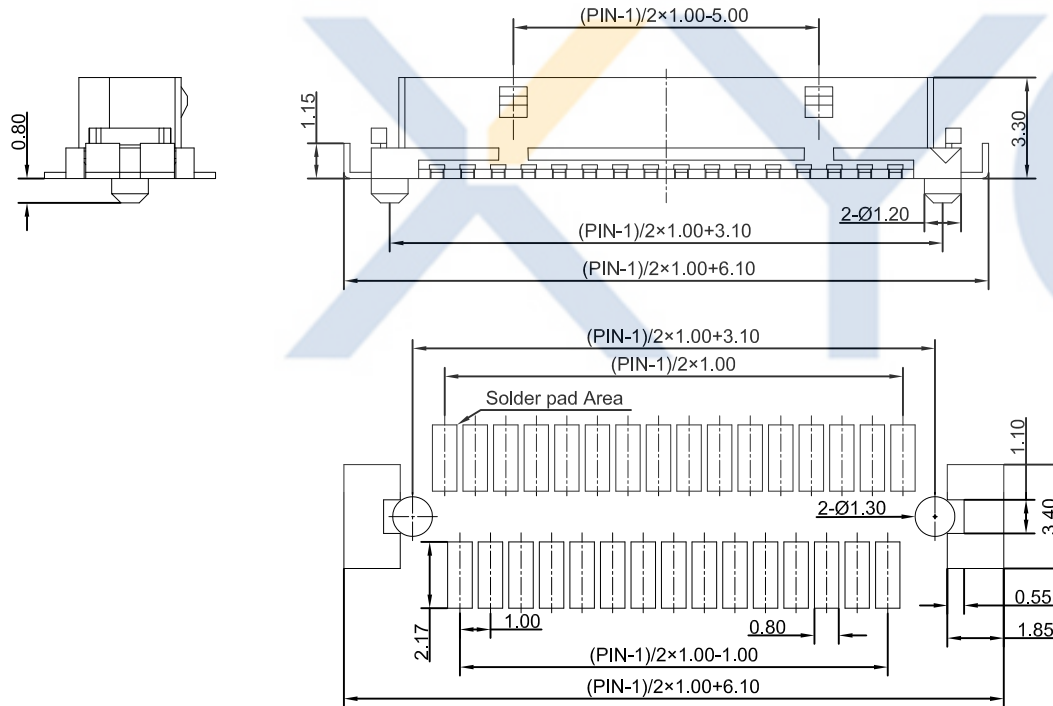


DRAWING FOR CUSTOMER

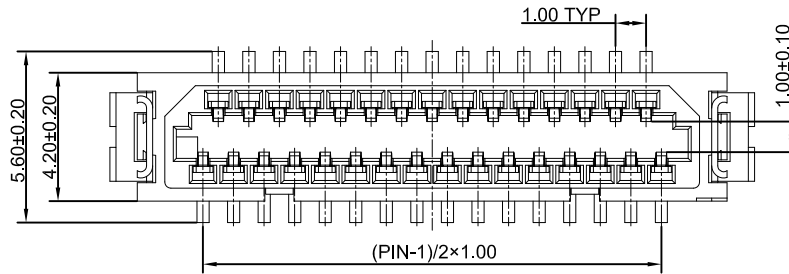

Recommended P.C.B Layout(Top Side)

P.C.B Thickness=1.20mm (Tolerance=±0.05)

■SPEC.:

- Rated Voltage:150V AC,DC
- Rated Current:0.5A AC,DC
- Withstand Voltage:250V AC/minute
- Contact Resistance:50mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range:-25℃~+105℃

■Material

- Insulator(A):PA46 UL94V-0
- Contact(B):Phosphor Bronze
Finish:Gold/Tin-Plated,over Nickel
- Solder Tab(C):Brass
Finish:Tin-Plated,over Nickel

KB909-XX X S V 2 A

Pin No.

- 21=21 Pin
- 31=31 Pin
- 41=41 Pin
- 51=51 Pin

包裝方式:

- T:TUBE (管裝)
- R:REEL (卷裝)
- P: PE (袋裝)

Version

Mold No.

R:Right Angle
V:Vertical

S:SMT

D:DIP

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2010-08-18		A	CHANGE HISTORY 變更歷史	KB909-XXXSV2A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB909-XXXSV2A		UNIT 單位	mm	PRODUCT NAME 產品名稱	DF9 PH1.00mm Board Wire Board SMT Vertical Wafer-Female
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號				
								APPROVED 核准	William	DWG NO. 圖號	PE1804008A			