


DRAWING FOR CUSTOMER

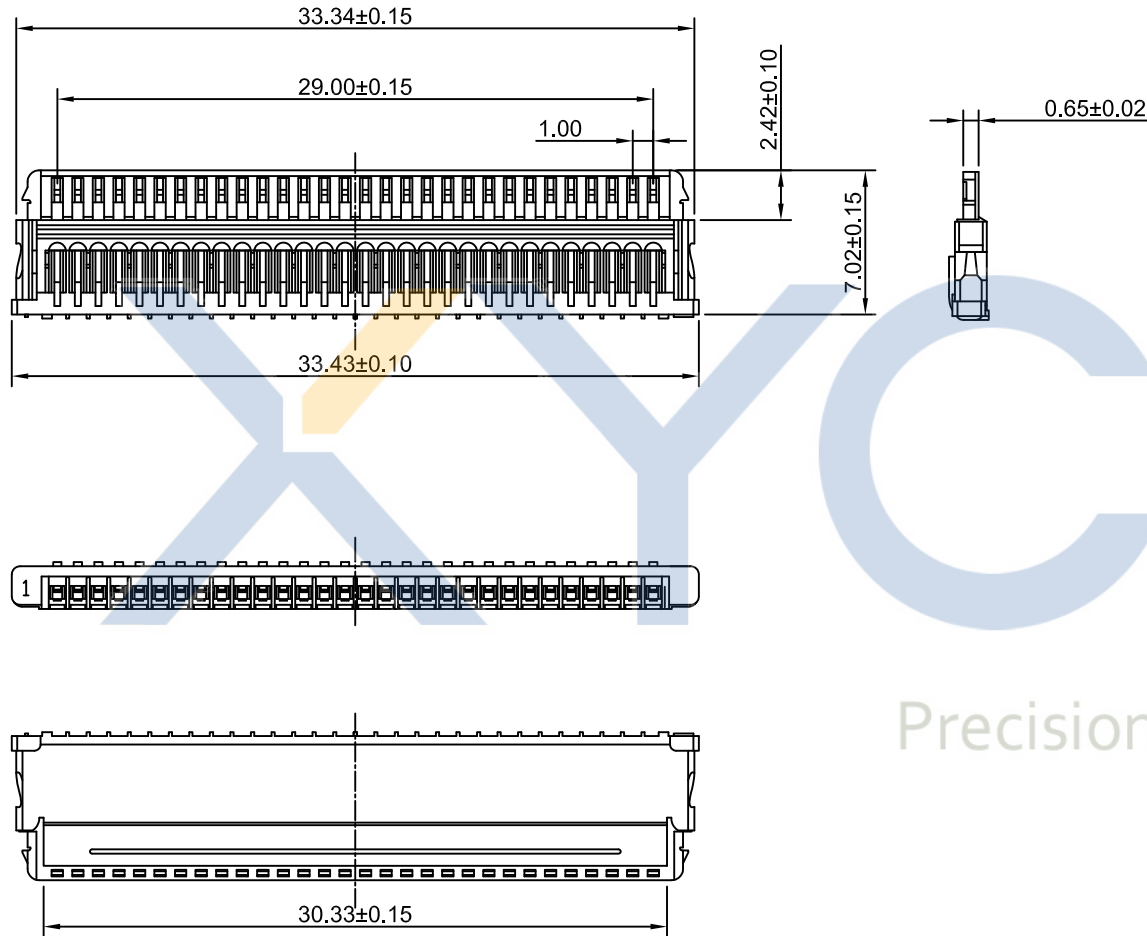

■SPEC.:

- Rated Voltage:200V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-40℃~+85℃
- Applicable wire:AWG#28~32
- QTY.:500PCS/Plate

■Notes:

- Housing:PA66 UL94V-0(white)
- Shell:Stainless Stell

KB902- 30 H C X A

Pin No.

Housing

With Bar

Version

Mold No.

Precision Connectors

XYCO PRECISION CONNECTORS
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者 譚火秦	CHECKED 審查 彭太坤	APPROVED 核准 譚宏	KB902-30HCXA
2013-05-27	A		KB902-30HCXA	譚火秦					PART NO. 料號
									DWG NO. 圖號
									PE2108A

UNIT 單位	mm	PRODUCT NAME 產品名稱	FI-X PH1.00mm Wire To Board Housing
------------	----	----------------------	--