
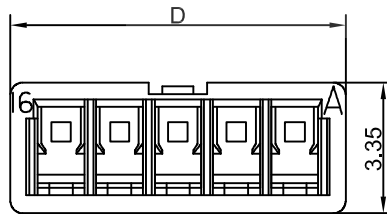




# DRAWING FOR CUSTOMER



■SPEC.:

- Rated Voltage:50V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator:Nylon UL94V-0
- Color:White

KB920-XXH4A

Pin No.

Version

Housing

Mold No.

Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	3.30	3.70	4.10
03	3.00	4.80	5.20	5.60
04	4.50	6.30	6.70	7.10
05	6.00	7.80	8.20	8.60
06	7.50	9.30	9.70	10.10
07	9.00	10.80	11.20	11.60
08	10.50	12.30	12.70	13.10
09	12.00	13.80	14.20	14.60
10	13.50	15.30	15.70	16.10
11	15.00	16.80	17.20	17.60
12	16.50	18.30	18.70	19.10
13	18.00	19.80	20.20	20.60
14	19.50	21.30	21.70	22.10
15	21.00	22.80	23.20	23.60

**XYCO** 东莞市轩业电子科技有限公司  
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2013-09-13	A		KB920-XXH4A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB920-XXH4A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位
						APPROVED 核准	William	DWG NO. 圖號	mm
								PE1709002A	PRODUCT NAME 產品名稱
									87439 PH1.50mm Wire To Board Housing

