



DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:100V AC,DC
 - Rated Current:1A AC,DC
 - Withstand Voltage:300V AC/minute
 - Contact Resistance:30mΩ max
 - Insulation Resistance:500MΩ min
 - Temperature Range:-35℃~+85℃

- Material and finish
- Insulator:LCP,UL94V-0
 - Contact Pin:Copper alloy
Finish:Gold-Plated on contact area
Tin /Lead on solder area,over Nickel
 - Shell:Copper alloy

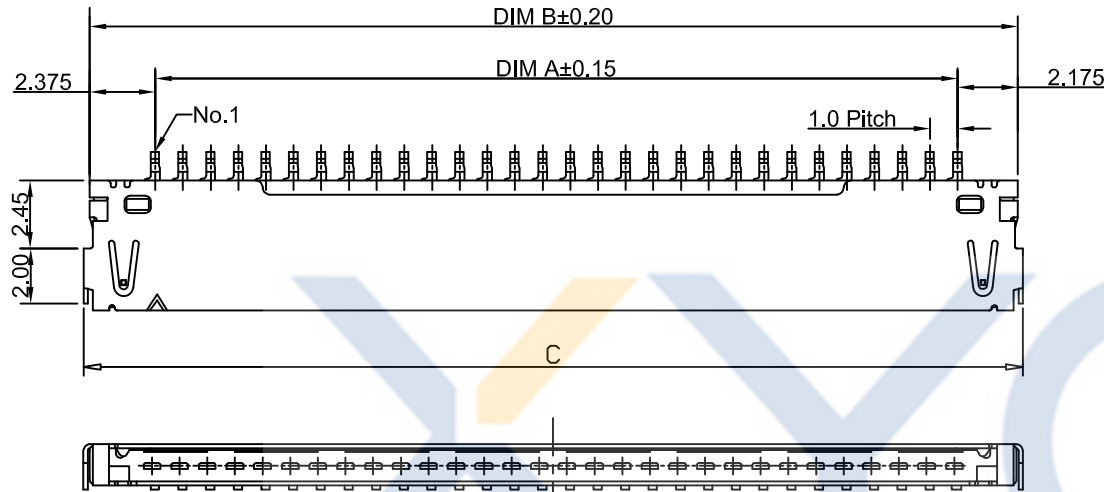


KB906-XX R S R 2 A

Pin No. Version
 Mold No.

T:TUBE 管裝
R:REEL 卷裝
P:PE 袋裝

R:Right Angle
V:Vertical

D:DIP
S: SMT

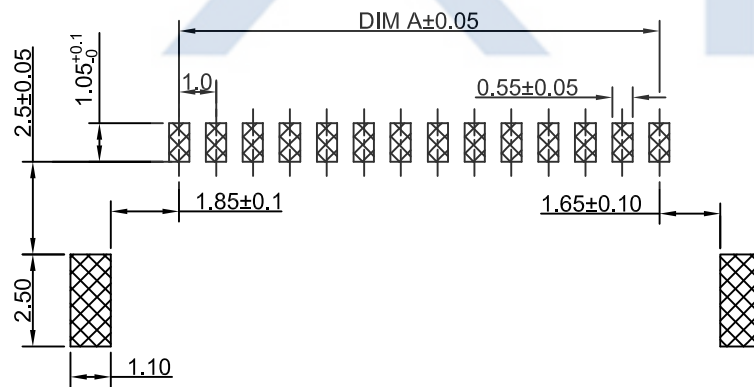

Recommended PCB Layout

Poles	Dimensions(mm)		
	A	B	C
14	13.00	17.55	17.95
20	19.00	23.55	23.95
30	29.00	33.55	33.95

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

					TOLERANCE 公差	DRAWING 設計者	Devin	KB906-XXRSR2A			
2013-09-13	A	CHANGE HISTORY 變更歷史	KB906-XXRSR2A	Devin	.X=±0.30	CHECKED 審查	Thomas	PART NO. 料號			
DATE 日期	VER 版本				.XX=±0.20	APPROVED 核准	William	DWG NO. 圖號	PE2506A	UNIT 單位	mm
					.XXX=±0.10					PRODUCT NAME 產品名稱	DF19 PH1.0mm SMT Right Angle Wafer

