






DRAWING FOR CUSTOMER



2P



3P

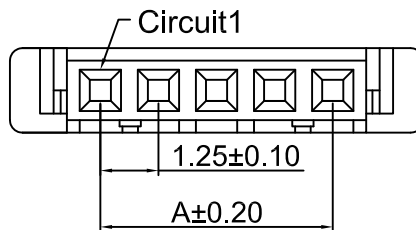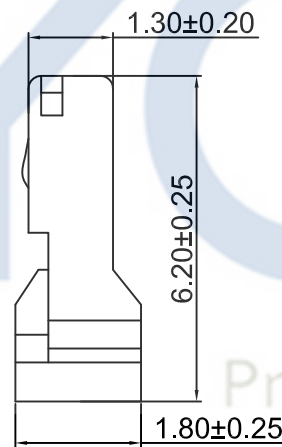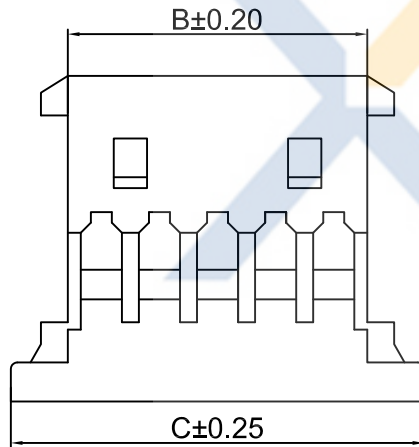

- SPEC.:
- Rated Voltage:125V AC,DC
 - Rated Current:1A AC,DC
 - Withstand Voltage:250V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-25°C~+85°C

- Material:
- Insulator:PA66 UL94V-0
 - Color:Beige

KB916-XXH6A

Part No. _____ Version _____

Housing _____ Mold No. _____

Poles	Dimensions(mm)		
	A	B	C
02	1.25	2.72	5.72
03	2.50	3.97	6.97
04	3.75	5.22	8.22
05	5.00	6.47	9.47
06	6.25	7.72	10.72
07	7.50	8.97	11.97
08	8.75	10.22	13.22
09	10.00	11.47	14.47
10	11.25	12.72	15.72
11	12.50	13.97	16.97
12	13.75	15.22	18.22
14	16.25	17.72	20.72
15	17.50	18.97	21.97
20	23.75	25.22	28.22
30	36.25	37.72	40.72

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2013-08-17		A	CHANGE HISTORY		KB916-XXH6A	Devin	TOLERANCE 公差		DRAWING 設計者	Devin	KB916-XXH6A		UNIT 單位		mm	PRODUCT NAME 產品名稱		51146 PH1.25mm Wire To Board Housing	
DATE 日期	VER 版本		CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas		PART NO. 料號								
								APPROVED 核准	William		DWG NO. 圖號	PE3202A							