
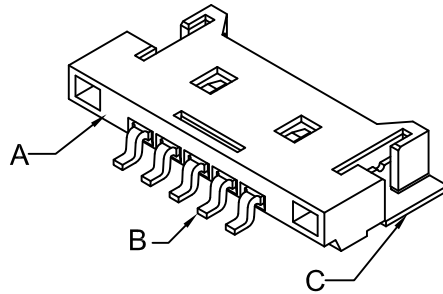


DRAWING FOR CUSTOMER



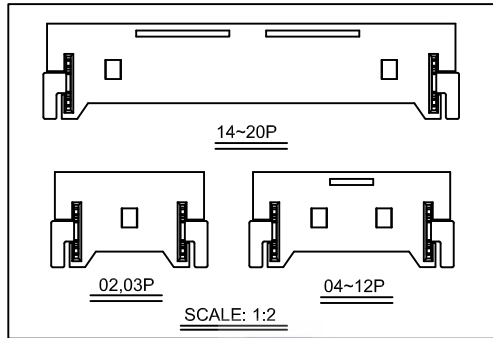


■SPEC.:

- Rated Voltage:125V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃

■Material

- Insulator(A):PA9T UL94V-0
- Contact(B):Brass
Finish:Gold-Plated;over Nickel
- Solder Tab(C):Brass
Finish:Tin-Plated;over Nickel

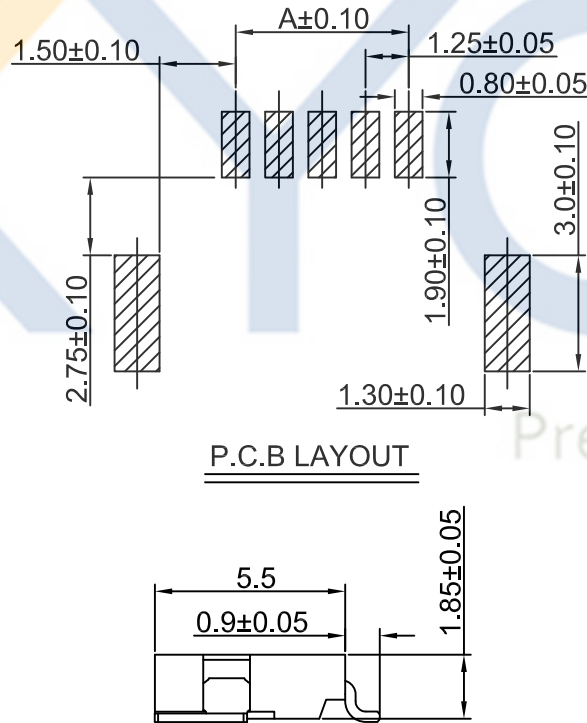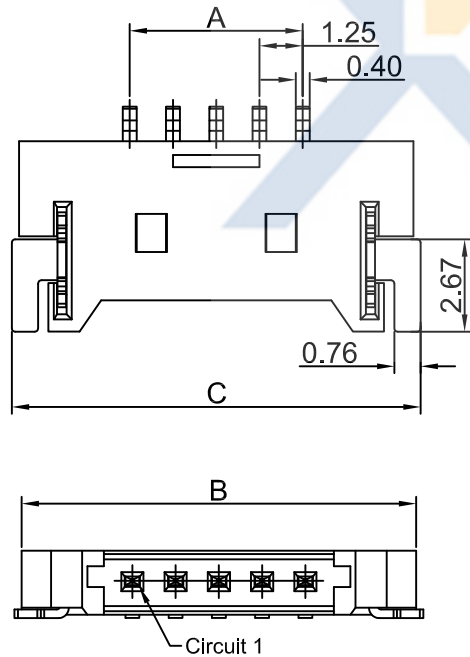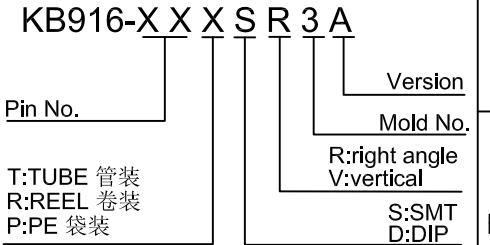

Poles	Dimensions(mm)		
	A	B	C
02	1.25	7.65	7.67
03	2.50	8.90	8.92
04	3.75	10.15	10.17
05	5.00	11.40	11.42
06	6.25	12.65	12.67
07	7.50	13.90	13.92
08	8.75	15.15	15.17
09	10.00	16.40	16.42
10	11.25	17.65	17.67
11	12.50	18.90	18.92
12	13.75	20.15	20.17
14	16.25	22.65	22.67
15	17.50	23.90	23.92
16	18.75	25.15	25.17
20	23.75	30.15	30.17
30	36.25	42.65	42.67

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2013-07-30		A	CHANGE HISTORY 變更歷史	KB916-XXXSR3A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB916-XXXSR3A		UNIT 單位		PRODUCT NAME 產品名稱	51146 PH1.25mm Wire To Board SMT Right Angle Wafer
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	mm			
							APPROVED 核准	William	DWG NO. 圖號	PE1902003A	mm			