

DRAWING FOR CUSTOMER

KB912- XX X S R 5 A

Pin No.

T:TUBE 管裝
R:REEL 卷裝
P:PE 袋裝

Version
Mold No.
R:Right angle
V:Vertical


S:SMT
D:DIP

■SPEC.:

- Rated Voltage:150V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:30mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range:-25℃~+85℃



■Material:

- Insulator :PA6T UL94V-0
Color:Natural
- Contact Pin :Brass
Finish:Tin-plated,over Nickel
- Solder Tab:Brass
Finish:Tin-plated,over Nickel


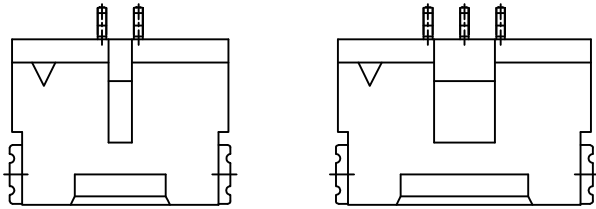


02P

03P

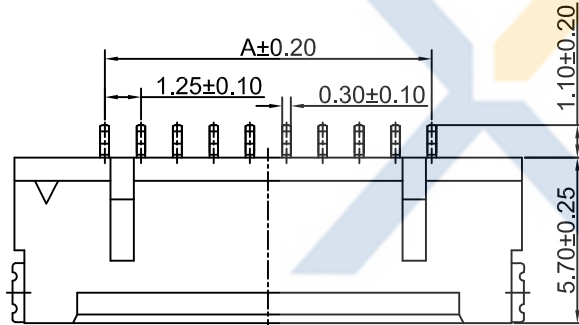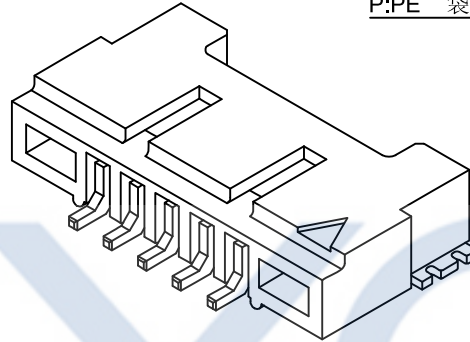

04P~30P

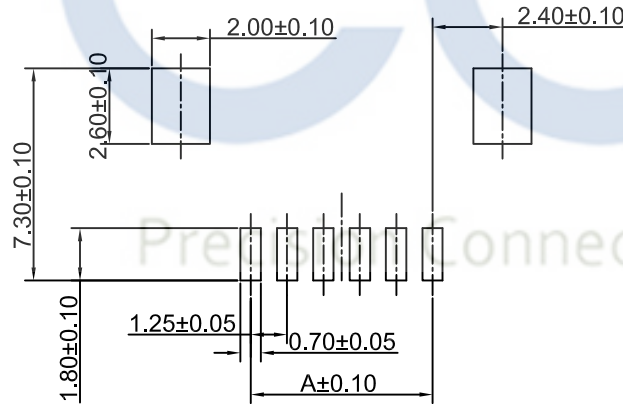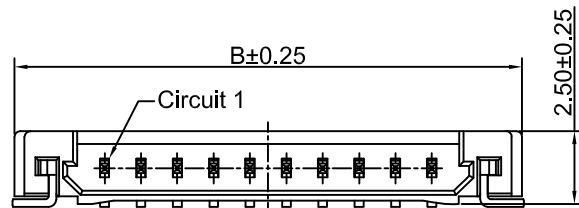

P.C.B LAYOUT

Poles	Dimensions(mm)	
	A	B
02	1.25	7.45
03	2.50	8.70
04	3.75	9.95
05	5.00	11.20
06	6.25	12.45
07	7.50	13.70
08	8.75	14.95
09	10.00	16.20
10	11.25	17.45
11	12.50	18.70
12	13.75	19.95
13	15.00	21.20
14	16.25	22.45
15	17.50	23.70
20	23.75	29.95
21	25.00	31.20
25	30.00	36.20
30	36.25	42.45

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-06-16		A	CHANGE HISTORY 變更歷史	KB912-XXXSR5A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB912-XXXSR5A		UNIT 單位	mm	PRODUCT NAME 產品名稱	DF14 PH1.25mm Wire To Board SMT Right angle Wafer
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號				
								APPROVED 核准	William	DWG NO. 圖號	PE211010A			