
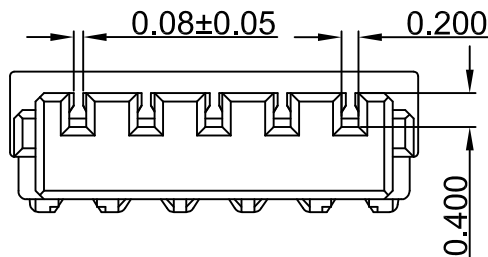
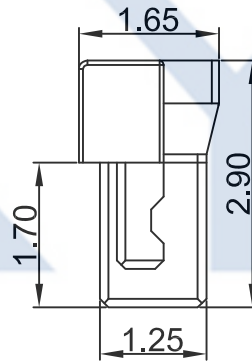
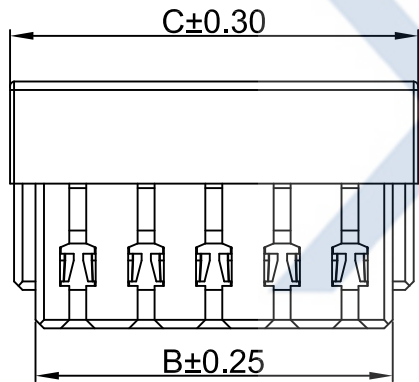
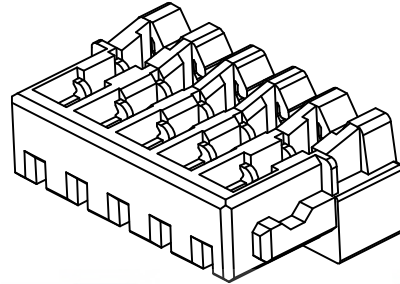



DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:30V AC,DC
 - Rated Current:0.5A AC,DC(AWG#32)
 - Withstand Voltage:200V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator:PA66, UL94V-0
 - Contact:Phosphor Bronze
 - Applicable Wire:AWG#32~#36
 - Insulation O.D:0.39mm (AWG#32) MAX

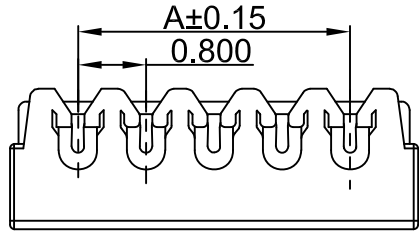

KB801-XX H XX T 2 A

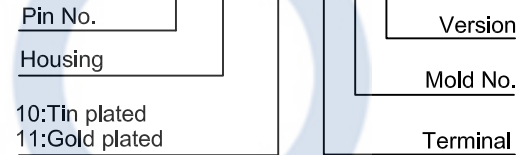

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.80	1.78	2.40	12	8.80	9.78	10.40
03	1.60	2.58	3.20	13	9.60	10.58	11.20
04	2.40	3.38	4.00	14	10.40	11.38	12.00
05	3.20	4.18	4.80	15	11.20	12.18	12.80
06	4.00	4.98	5.60	16	12.00	12.98	13.60
07	4.80	5.78	6.40	17	12.80	13.78	14.40
08	5.60	6.58	7.20	18	13.60	14.58	15.20
09	6.40	7.38	8.00	19	14.40	15.38	16.00
10	7.20	8.18	8.80	20	15.20	16.18	16.80
11	8.00	8.98	9.60	22	16.80	17.78	18.40

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2014-06-18		A		KB801-XXHXXT2A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB801-XXHXXT2A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史		CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位
							APPROVED 核准	William	DWG NO. 圖號	mm
1		2		3					PE1908002A	

PRODUCT NAME 產品名稱	SUR PH0.80mm Wire To Board Connector Ear
----------------------	---