

DRAWING FOR CUSTOMER

KB911-D XX X S V 5 A

Double row

Pin No.

包装方式:

T:TUBE (管装)

R:REEL (卷装)

P: PE (袋装)

Version

Mold No.

R:Right Angle

V:Vertical

S:SMT





D:DIP

■SPEC.:

- Rated Voltage:150V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:30mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator(A) :PA6T UL94V-0
- Contact Pin(B):Brass
Finish:Gold-plated,over Nickel
- Solder Tab(C):Brass
Finish:Tin-plated,over Nickel
- Cap(D):PA6T UL94V-0

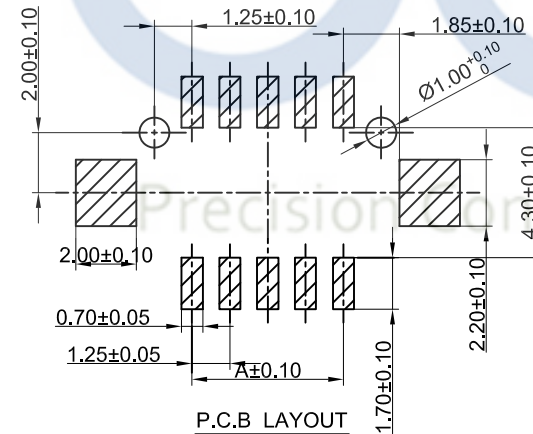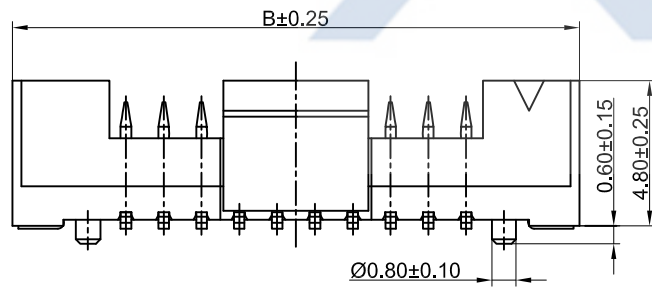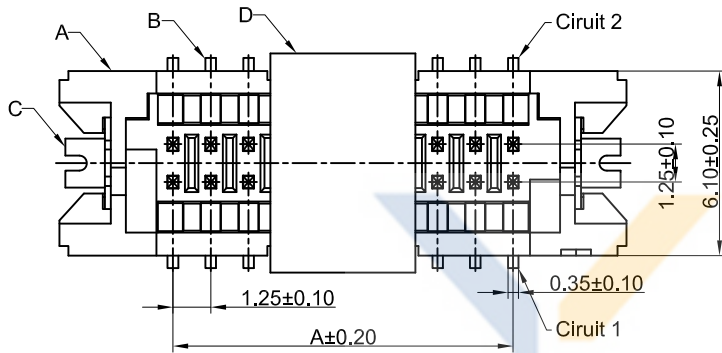

Poles	Dimensions(mm)	
	A	B
2*05	5.00	12.50
2*07	7.50	15.00
2*10	11.25	18.75
2*15	17.50	25.00
2*20	23.75	31.25

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-06-21		A	CHANGE HISTORY 變更歷史	KB911-DXXXXV5A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB911-DXXXXV5A		UNIT 單位		PRODUCT NAME 產品名稱	DF13 PH1.25mm Wire To Board Double Row SMT Vertical Wafer
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X \pm 0.30 .XX \pm 0.20 .XXX \pm 0.10	CHECKED 審查	Thomas	PART NO. 料號	mm			
								APPROVED 核准	William	DWG NO. 圖號	PE2107036A	mm		