


DRAWING FOR CUSTOMER

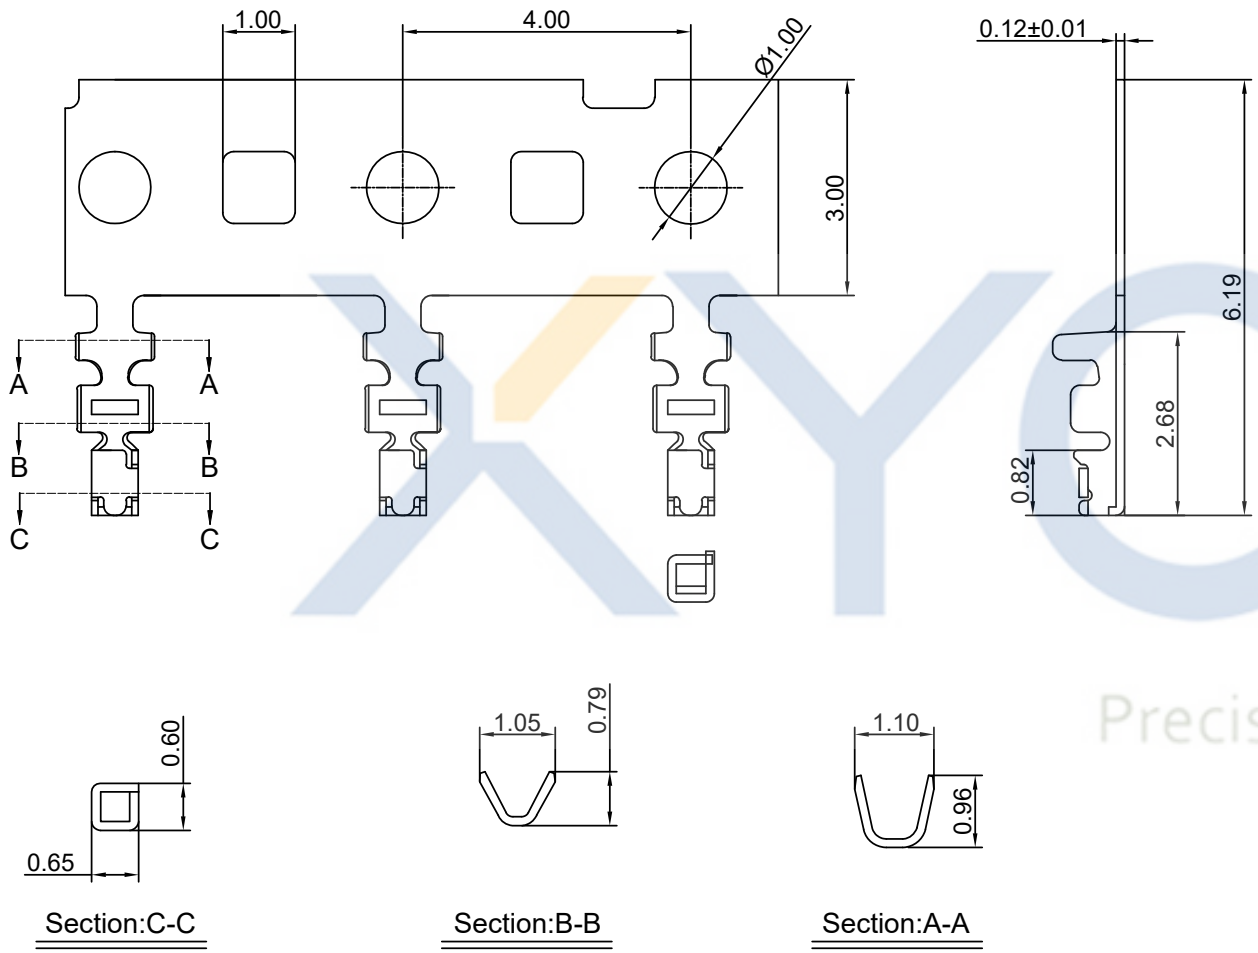

- SPEC.:
- Rated Voltage: 30V AC,DC
- Rated Current:0.5A AC,DC
- Withstand Voltage: 200V AC/minute
- Contact Resistance: 20mΩ max
- Insulation Resistance: 100MΩ min
- Temperature Range: -25°C~+85°C
- Terminal:
- Material:Phosphor Bronze
- Applicable Wire: AWG28#~32#
- Insulation O.D:0.60mm (MAX)
- Finish: Tin-plated;over Nickel
- QTY.:20KPCS/Reel

KB804-X X T 4 A

1:All plated
2:Half plated

Plating
0: Tin-plat
1: Gold Plat1u"
2: Gold Plat3u"
3: Gold Plat5u"

Version
Mold No.
Terminal

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

| | | | | | | | | | | | | | |
|------------|-----------|------------------------|-----------------------|----------------|-------------------------------------|----------------|---------|---------------|-----------|------------|----|----------------------|--------------------------------------|
| 2018-11-25 | | A | | | TOLERANCE 公差 | DRAWING 設計者 | Devin | KB804-XXT4A | | UNIT 單位 | mm | PRODUCT NAME 產品名稱 | DF52 PH0.8 Wire to Board Terminal |
| DATE 日期 | VER 版本 | CHANGE HISTORY 變更歷史 | CHANGED NAME 修改後料號 | DRAWING 變更者 | .X=±0.30 .XX=±0.20 .XXX=±0.10 | CHECKED 審查 | Thomas | PART NO. 料號 | PE181106A | | | | |
| | | | | | | APPROVED 核准 | William | DWG NO. 圖號 | | | | | |