

DRAWING FOR CUSTOMER

KB801-XXH11TXA

Pin No.

Housing

10: Tin plated

11: Gold plated

Version

Mold No.




Terminal

■ Specifications:

- Rated Voltage: 30V AC,DC
- Rated Current: 0.5A AC,DC
- Withstand Voltage: 200V AC/minute
- Contact Resistance: 20mΩ, (MAX.)
- Insulation Resistance: 100MΩ, (MIN.)
- Temperature Range: -25°C~+85°C

■ Housing:

- Material: PA66 UL94V-0
- Terminal: Phosphor Bronze/Gold-Plated

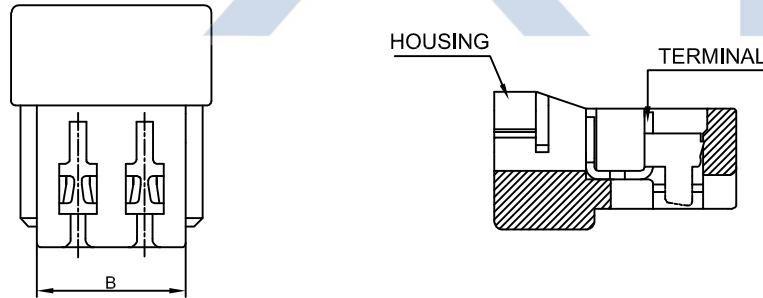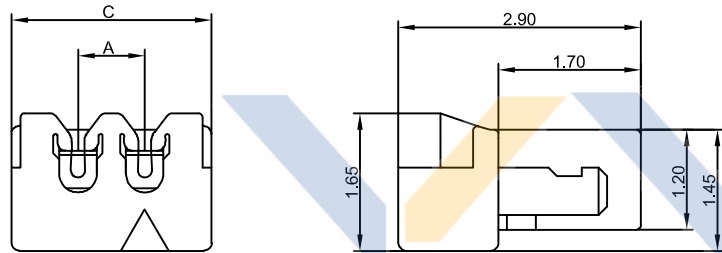

CKT	Dimension mm		
	A	B	C
2	0.80	1.78	2.40
3	1.60	2.58	3.20
4	2.40	3.38	4.00
5	3.20	4.18	4.80
6	4.00	4.98	5.60
7	4.80	5.78	6.40
8	5.60	6.58	7.20
10	7.20	8.18	8.80
12	8.80	9.78	10.40
14	10.40	11.38	12.00
15	11.20	12.18	12.80
16	12.00	12.98	13.60
17	12.80	13.78	14.40
18	13.60	14.58	15.20
20	15.20	16.30	18.18
22	16.80	17.90	19.78

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2012-05-09		A			TOLERANCE 公差	DRAWING 設計者	譚火秦	KB801-XXH11TXA		UNIT 單位		mm	PRODUCT NAME 產品名稱		JST SUR PH0.8mm Wire To Board Connector
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史		CHANGED NAME 修改後料號	DRAWING 變更者	CHECKED 審查	彭太坤	PART NO. 料號		DWG NO. 圖號	PE1708025A				
					.X=±0.30 .XX=±0.20 .XXX=±0.10	APPROVED 核准	譚宏								