


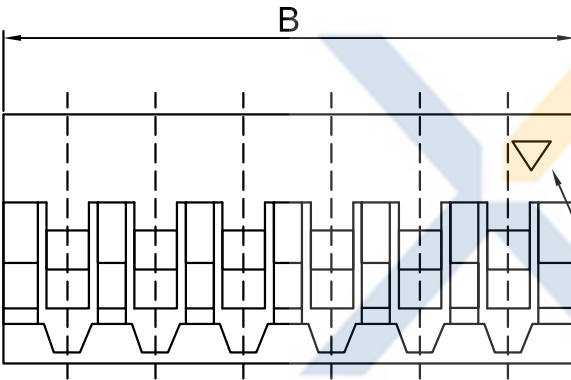


DRAWING FOR CUSTOMER

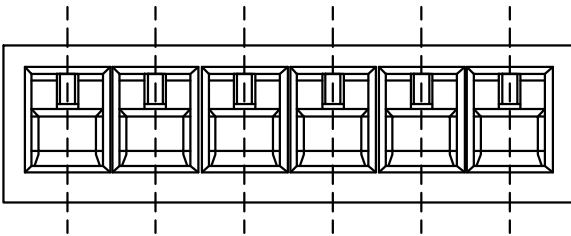

CIRCUIT NO:1

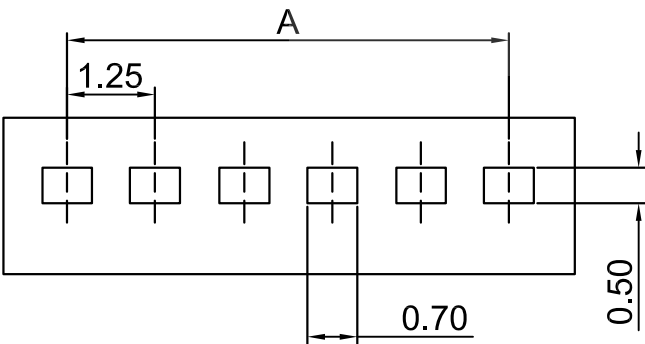


- SPEC.:
- Voltage Rating:125V AC/DC
- Current Rating:1A AC/DC
- Withstanding Voltage:800V AC/minute
- Contact Resistance:10mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25°C~+85°C
- Material:
- Insulator:PA66 UL94V-0
- Color :White

KB910-X X H 4 A

Part No. Version

Housing Mold No.

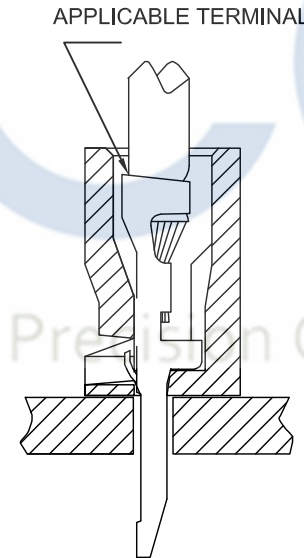

Poles	Dimensions(mm)	
	A	B
02	1.25	3.05
03	2.50	4.30
04	3.75	5.55
05	5.00	6.80
06	6.25	8.05
07	7.50	9.30
08	8.75	10.55
09	10.00	11.80
10	11.25	13.05
11	12.50	14.30
12	13.75	15.55
13	15.00	16.80
14	16.25	18.05
15	17.50	19.30

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2015-06-28		A	CHANGE HISTORY 變更歷史	KB910-XXH4A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB910-XXH4A		UNIT 單位		PRODUCT NAME 產品名稱	51022 PH1.25mm Wire To Board Housing
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X \pm 0.30 .XX \pm 0.20 .XXX \pm 0.10	CHECKED 審查	Thomas	PART NO. 料號	mm			
							APPROVED 核准	William	DWG NO. 圖號	PE1706007A				