
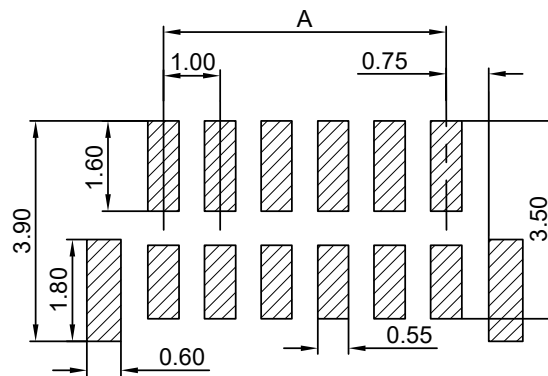


DRAWING FOR CUSTOMER

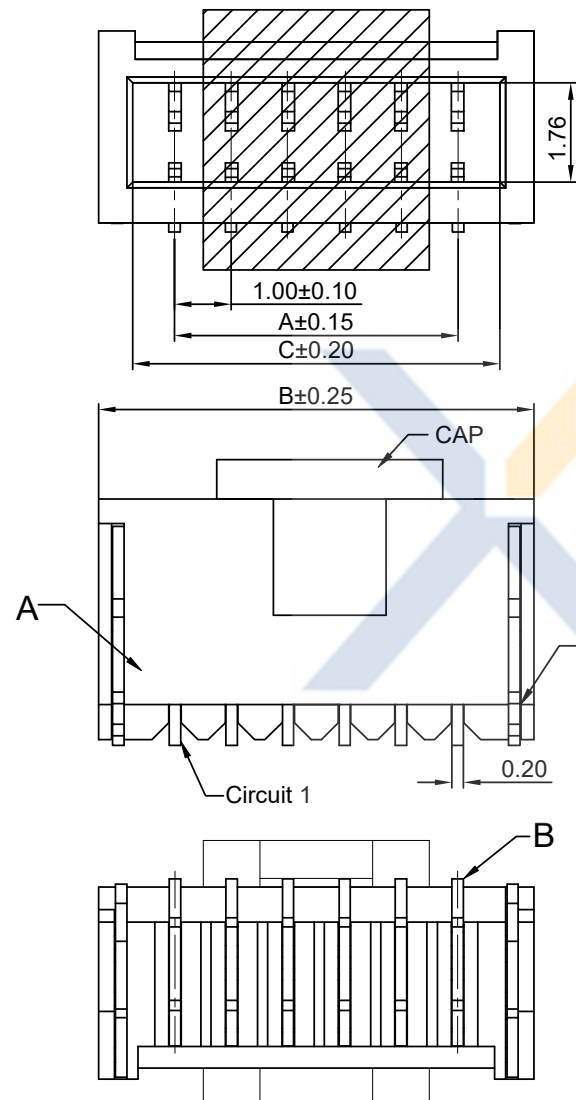


RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

- SPEC.:
 - Rated Voltage: 50V AC,DC
 - Rated Current: 1A
 - Withstand Voltage: 500V AC/minute
 - Contact Resistance: 20mΩ max
 - Insulation Resistance: 100MΩ min
 - Temperature Range: -25°C~+85°C

- Material:
 - Insulator(A): P1-PA9T, UL94V-0
Color:NAT-Nature
 - Contact Pin(B): Phosphor Bronze
Finish:Tin-Plated,over Nickel
 - Solder Tab(C):Phosphor Bronze
Finish:Tin-Plated,over Nickel

KB9902-X X X S L V 3 A -P1-NAT

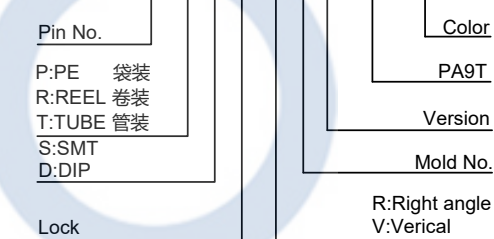

Poles	Dimension(mm)			Poles	Dimension(mm)		
	A	B	C		A	B	C
02	1.00	3.70	2.50	12	11.00	13.70	12.50
03	2.00	4.70	3.50	13	12.00	14.70	13.50
04	3.00	5.70	4.50	14	13.00	15.70	14.50
05	4.00	6.70	5.50	15	14.00	16.70	15.50
06	5.00	7.70	6.50	16	15.00	17.70	16.50
07	6.00	8.70	7.50	17	16.00	18.70	17.50
08	7.00	9.70	8.50	18	17.00	19.70	18.50
09	8.00	10.70	9.00	19	18.00	20.70	19.00
10	9.00	11.70	10.50	20	19.00	21.70	20.50
11	10.00	12.70	11.50				

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2014-03-07		A		KB9902-XXXXSLV3A-P1-NAT		Devin		TOLERANCE 公差		DRAWING 設計者 Devin		KB9902-XXXXSLV3A-P1-NAT		UNIT 單位 mm		PRODUCT NAME 產品名稱		NH1.0mm Wire to Board	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史		CHANGED NAME 修改後料號		DRAWING 變更者		.X=±0.30	.XX=±0.20	.XXX=±0.10	CHECKED 審查	THOMAS	PART NO. 料號			NH1.0mm Wire to Board		SMT Vertical Wafer	
							APPROVED 核准	WILLIAM	DWG NO. 圖號	PE220119A	SMT Vertical Wafer								