DRAWING FOR CUSTOMER

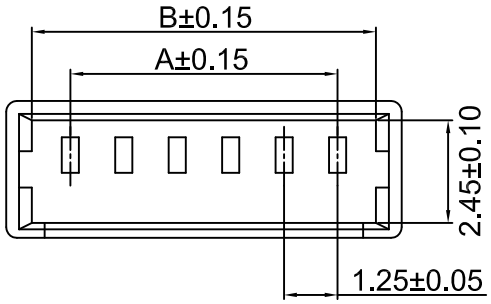

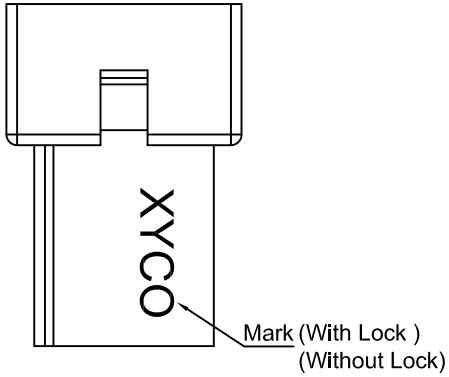

2~3PIN

■SPEC.:
- ●Rated Voltage:125V AC,DC
- ●Rated Current:1A AC,DC
- ●Withstand Voltage:500V AC/minute
- ●Contact Resistance:20mΩ max
- ●Insulation Resistance:100MΩ min
- ●Temperature Range:-25℃~+85℃

■Material:
- ●Insulator:PA66 UL94-V0
  Color:White

KB915-X X H 1 A-F1 X

- Part No.
- Housing
- Mold No.
- Version
- Wire To Wire
- Logo

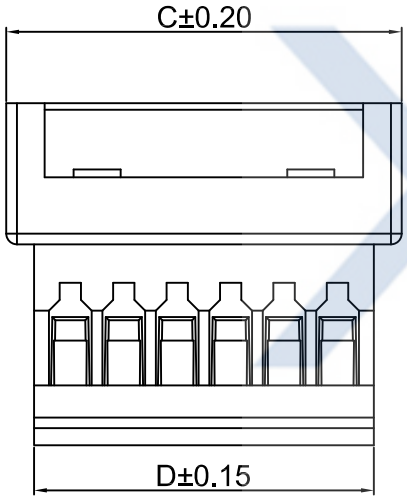

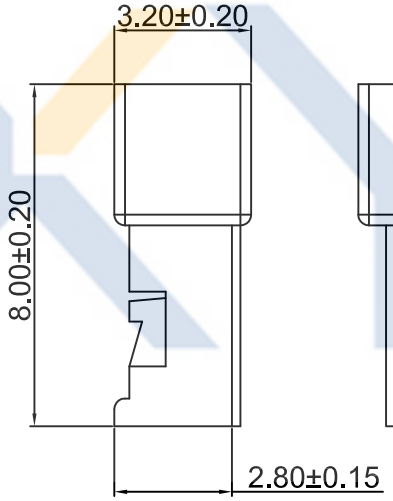

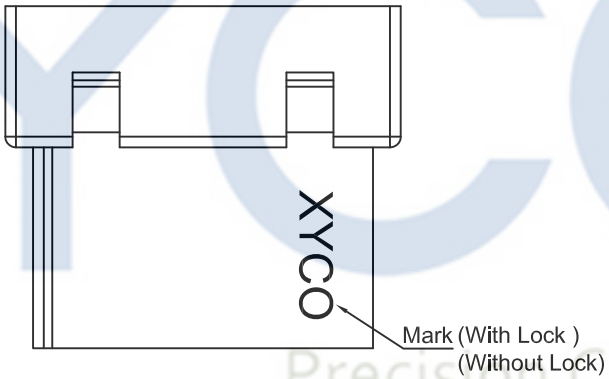

3PIN以上

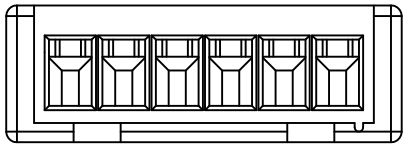

Poles	Dimension(mm)			
	A	B	C	D
02	1.25	3.05	4.25	2.95
03	2.50	4.30	5.50	4.20
04	3.75	5.55	6.75	5.45
05	5.00	6.80	8.00	6.70
06	6.25	8.05	9.25	7.95
07	7.50	9.30	10.50	9.20
08	8.75	10.55	11.75	10.45
09	10.00	11.80	13.00	11.70
10	11.25	13.05	14.25	12.95
11	12.50	14.30	15.50	14.20
12	13.75	15.55	16.75	15.45
13	15.00	16.80	18.00	16.70
14	16.25	18.05	19.25	17.95
15	17.50	19.30	20.50	19.20

XYCO Precision Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2014-07-28	A		KB915-XXH1A-F1X	Devin

TOLERANCE 公 差	.X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者	Devin
		CHECKED 審查	Thomas
		APPROVED 核准	William

KB915-XXH1A-F1X			
PART NO. 料號		UNIT 單位	mm
DWG NO. 圖號	PE3105A		

PRODUCT NAME 產品名稱	51047 PH1.25mm Wire To Wire Housing