
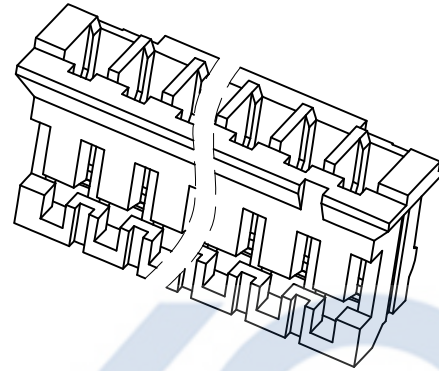




# DRAWING FOR CUSTOMER

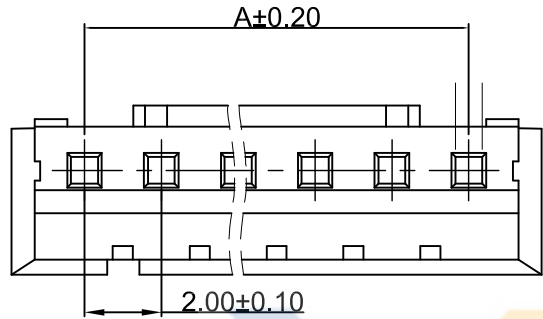

- SPEC.:
- Rated Voltage:250V AC,DC
  - Rated Current:1A AC,DC
  - Withstand Voltage:500V AC/minute
  - Contact Resistance:20mΩ max
  - Insulation Resistance:1000MΩ min
  - Temperature Range:-25°C~+85°C
- HOUSING
- Material:PA66 UL94V-0
  - QTY.:1000PCS/Plate

KB933-XXH4A

Pin No.                      Version  
Housing                      Mold No.

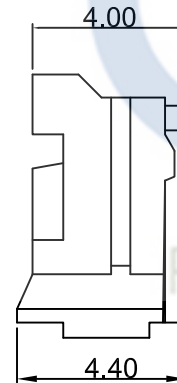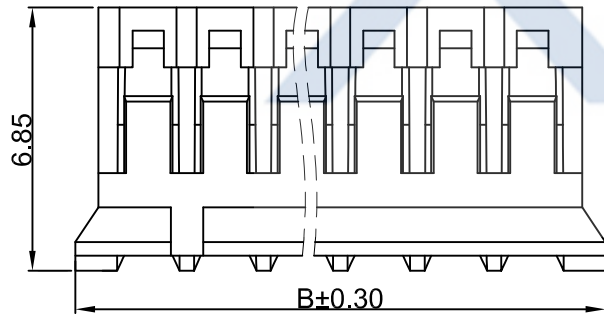

Poles	Dimension(mm)		Poles	Dimension(mm)	
	A	B		A	B
2	2.00	5.80	10	18.00	21.80
3	4.00	7.80	11	20.00	23.80
4	6.00	9.80	12	22.00	25.80
5	8.00	11.80	13	24.00	27.80
6	10.00	13.80	14	26.00	29.80
7	12.00	15.80	15	28.00	31.80
8	14.00	17.80	16	30.00	33.80
9	16.00	19.80			

## XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-11-30		A	KB933-XXH4A		John	TOLERANCE 公差	DRAWING 設計者	John	KB933-XXH4A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
							APPROVED 核准	William	DWG NO. 圖號	PE1705007A

UNIT 單位	mm	PRODUCT NAME 產品名稱	JST PHR PH2.0mm Wire To Board Housing
------------	----	----------------------	--